



LPC P-cap Panel PC 1X Series With Gen 7/6 Core-i7/5/3 User Manual

Published in Taiwan

Release Date : Feb 2019

Revision : V1.0

Warning!

This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions manual, it may cause interference to radio communications. It has been tested and found to comply with the limits for a Class A computing device pursuant to FCC Rules, which are designed to provide reasonable protection against such interference when operated in a commercial environment. Operation of this equipment in a residential area is likely to cause interference in which case the user at his own expense will be required to take whatever measures may

be required to correct the interference.

Electric Shock Hazard – Do not operate the machine with its back cover removed. There are dangerous high voltages inside.

Disclaimer

This information in this document is subject to change without notice. In no event shall ELGENS Co., Ltd. be liable for damages of any kind, whether incidental or consequential, arising from either the use or misuse of information in this document or in any related materials.

Packing List

Accessories (as ticked) included in this package are:
<input type="checkbox"/> Panel Mounting Kits
<input type="checkbox"/> 3 Pin Male Terminal Block
<input type="checkbox"/> Optional Adapter
<input type="checkbox"/> Other. _____ (please specify)

Safety Precautions

Follow the messages below to avoid your systems from damage:

- ◆ Avoid your system from static electricity on all occasions.
- ◆ Prevent electric shock. Don't touch any components of this card when the card is power-on.
Always disconnect power when the system is not in use.
- ◆ Disconnect power when you change any hardware devices. For instance, when you connect a jumper or install any cards, a surge of power may damage the electronic components or the whole system.

Table of Contents

Warning!	1
Disclaimer.....	2
Packing List.....	2
Safety Precautions.....	2
Chapter 1 Getting Started	4
1.1 Brief Description of LPC P-cap Series	4
1.2 System Specifications.....	4
1.3 Dimension	8
1.4 General Rear IO Placement.....	16
1.5 Front View of LPC- Pcap Series.....	177
1.6 Rear View of LPC- Pcap Series.....	177
1.7 Top / Bottom IO View.....	178
1.8 Installation of HDD	188
Chapter 2 BIOS Setup	19
2.1 Entering Setup.....	199
2.2 The Menu Bar.....	21
2.3 Main	22
2.4 Advanced.....	23
2.5 Boot.....	29
2.6 Security	30
2.7 Chipset	38
2.8 Power	39
2.9 Save & Exit.....	41
Chapter 3 USB 3.0 driver installation	42
Chapter 4 Installation Drivers	45
4.1 Chipset Driver Installation.....	45
4.2 Graphics Driver Setup	48
4.3 Audio Driver Setup	51
4.4 LAN Driver Setup.....	54
4.5 SIO Driver Setup	57
4.6 ME Driver Setup	60

Chapter 1 Getting Started

1.1 Brief Description of LPC P-cap Series


The LPC P-cap 1X series is a power-optimized and delivers robust performance-per-watt for embedded HMI, powered by a Gen 7/6 Core-i7/5/3/Celeron U-Series processor. It comes with a Bezel-Free design, mSATA slot and a SATA 2.5-inch lockable HDD tray, up to 16GB DDR4 memory, audio jack, 2 Ethernet, DC input, and 4 USB 3.0 ports. The unit supports Win 7 Pro/ WES7 / Win 8 / Win 10. (Gen 7 CPU is only for Win10) The fanless touch panel computer is ideal for use as Web Browser, Terminal and HMI at all levels of automation control.

1.2 System Specifications

Model Number	LPC-P121S-1X	LPC-P150S-1X	LPC-P156W-1X	LPC-P170S-1X
Max Resolution	1024*768	1024*768	1920*1080	1280*1024
Color	16.7M	16.2M	16.2M	16.7M
Luminance	350 nits	420 nits	450 nits	350 nits
View Angle	160/160	160/160	170/170	160/140
Contrast Ratio	800	800	800	800
Model Number	LPC-P173W-1X	LPC-P185W-1X	LPC-P190S-1X	LPC-P215W-1X
Max Resolution	1920*1080	1920*1080	1280*1040	TBC
Color	16.7M	16.7M	16.7M	TBC
Luminance	400 nits	350 nits	350 nits	TBC
View Angle	140/160	189/189	160/170	TBC
Contrast Ratio	600	1000	1000	TBC
Computing				
Processor	Intel® KBL ULT i7-7600U/i5-7300U/i3-7100U/Celeron 3965U Processor Intel® SKL ULT i7-6600U/i5-6300U/i3-6100U/Celeron 3955U Processor			
System Memory	1 x SO-DIMM, up to 16 GB DDR4			
Storage	2 x SATA 6Gb/s ports (1 x lockable HDD tray) 1 x mSATA 6Gb/s slot (shared with Mini-PCle2)			
External I/O Port	4 x USB 3.0 2 x GbE LAN (LAN1: Intel® I219LM /LAN2: Intel® I210-AT) 1 x Display Port 1 x HDMI 3 x RS-232 (COM2/3/4)			

	1 x RS-485, (COM 1 , adjustable to RS-232/422 by BIOS) 1 x Audio 1 x Power press button 1 x 3-Pin Power Input
Expansion Slots	None
OS support	Win 7 Pro/ WES7 / Win 8 / Win 10 (Gen6/7) Win 10 (Gen 7)
Touch Screen	
Type	USB P-cap Touch
Light Transmission	90%
Power Supply	
Power Input	<ul style="list-style-type: none"> ■ DC9~36V Wide Range Power Input ■ Input on board fuse protection ■ Input reverse protection ■ Over current protection ■ Output short circuit protection
Mechanical	
Construction	Aluminum Bezel and Metal Case
IP Rating	Front Panel compliant IP65
Mounting	Panel/VESA
Environmental	
Operating Temperature	-20~60 °C
Storage Temperature	-30~70 °C
Storage Humidity	10~90% @40 °C non-condensing

Model Naming Rule

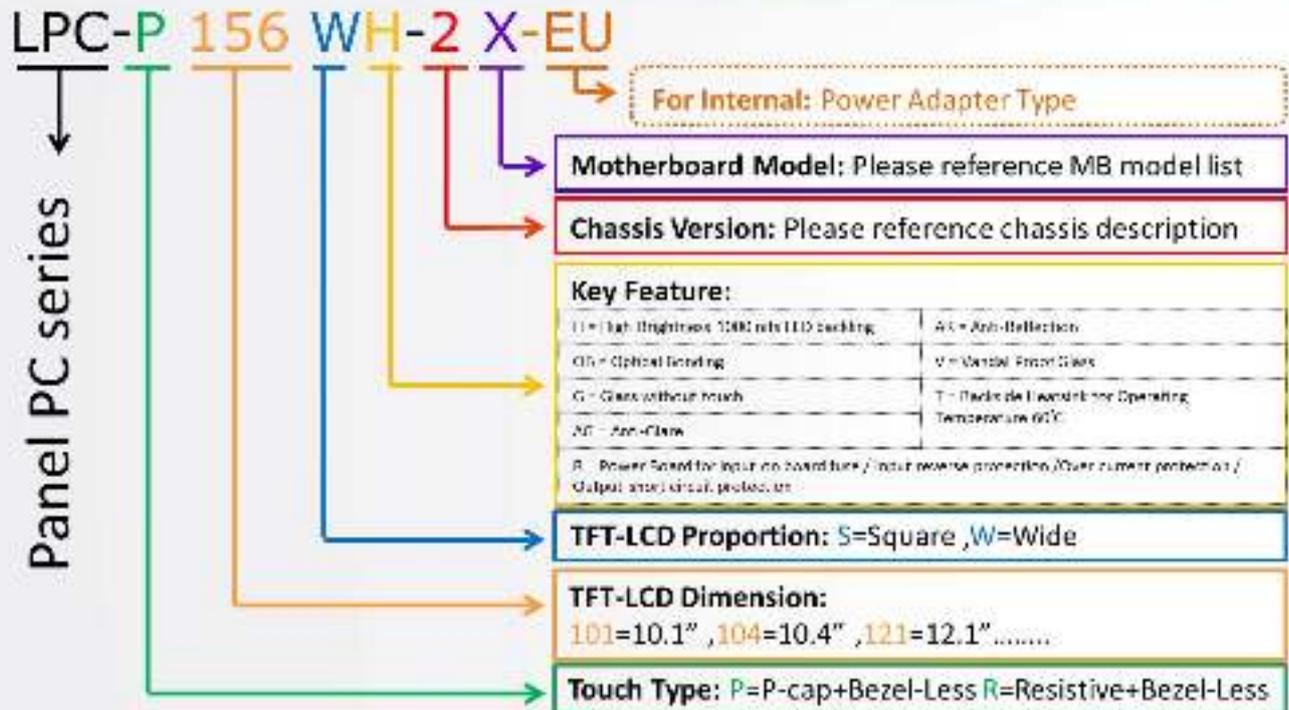

WWW.ELGENS.COM.TW

Customize Flexible Solutions





Order Information

LPC-Pxxxx-15	Bezel-Free P-cap Panel PC with i3-6100U , DC9~36V Power Input, including a 3-Pin Power Adapter
LPC-Pxxxx-16	Bezel-Free P-cap Panel PC with i5-6300U , DC9~36V Power Input, including a 3-Pin Power Adapter
LPC-Pxxxx-17	Bezel-Free P-cap Panel PC with i7-6600U , DC9~36V Power Input, including a 3-Pin Power Adapter
LPC-Pxxxx-18	Bezel-Free P-cap Panel PC with i5-7300U , DC9~36V Power Input, including a 3-Pin Power Adapter (Only work with Win 10)
WFK-024	Wi-Fi kits w/ cable & Antenna (2.4GHz, 802.11 b/g/n, 1T1R)
WFK-524	Wi-Fi kits w/ cable & Antenna (2.4 & 5GHz, 802.11 a/b/g/n/ac + BT, 2T2R)

Order Code	
LPC-P xxx S/W	-H / -OB / -G / -AG / -AR / -B / -V / -T
xxx = size, For example, 10.1" = 101	
S = Dimension Ratio Square = 4:3 or 5:4	
W= Dimension Ration Wide = 16:9 or 16:10	
H = High Brightness 1000 nits LED backlight (Optional to 1600 nits backlight)	
OB = Optical Bonding	
G = Glass without touch	
AG = Anti-Glare	
AR = Anti-Reflection	
V = Vandal Proof Glass	
T = Backside Heatsink for Operating Temperature 60°C	

1.3 Dimension

LPC-P121S-1X Drawing

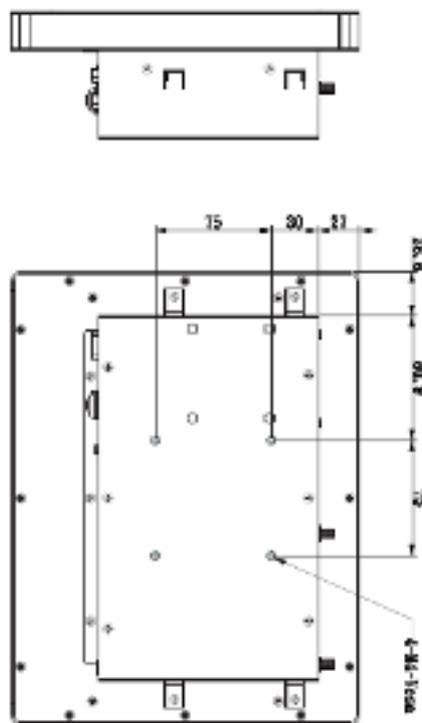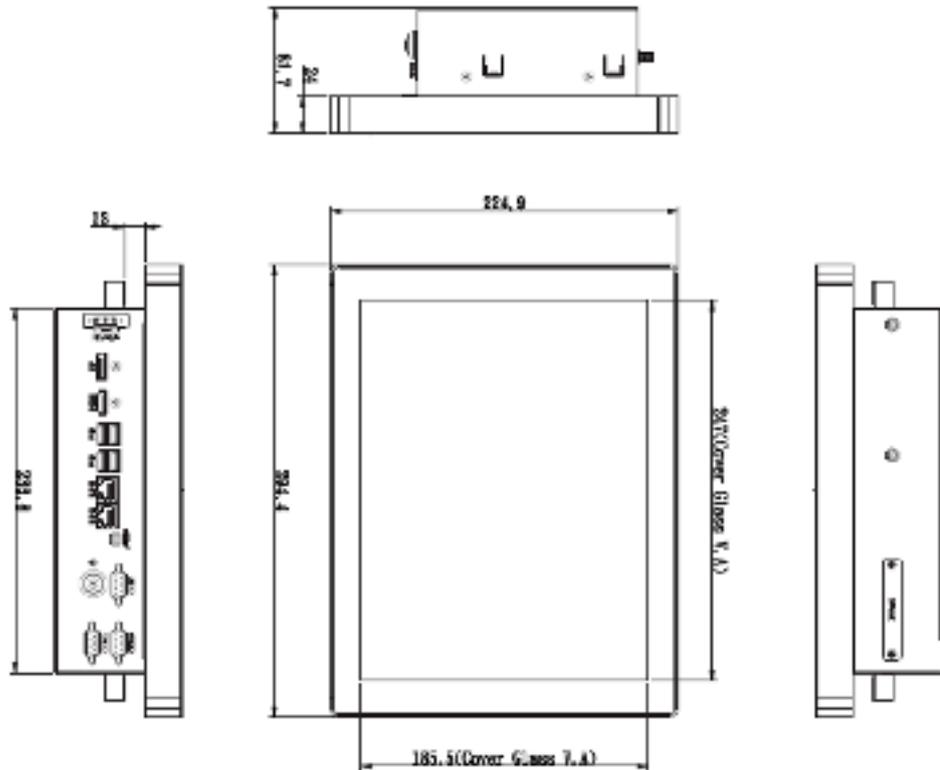




REV	DATE	REVISION
000-1000	1.1.1	INITIAL
1000-3000	1.1.1	THICKNESS
2000-5000	±0.10	FINISH
3000-10000	±1.0	SCALE 1:2
4000-15000	±2.0	UNIT
5000-20000	±0.05	UNIT

APPROVED	DESIGNED	DRAWN	CHECKED	DATE

NAME	MODEL NO	DATE	PLANT NO

ELGENS



LPC-P156W-1X Drawing

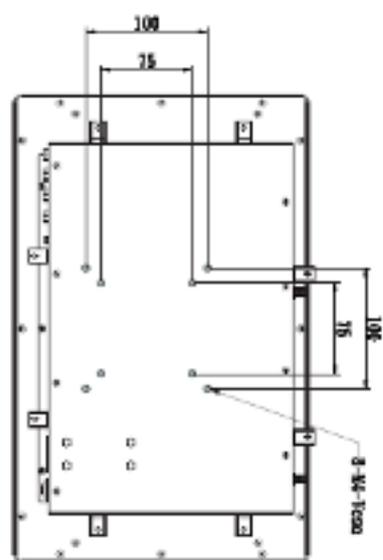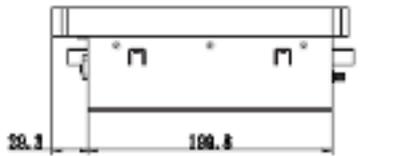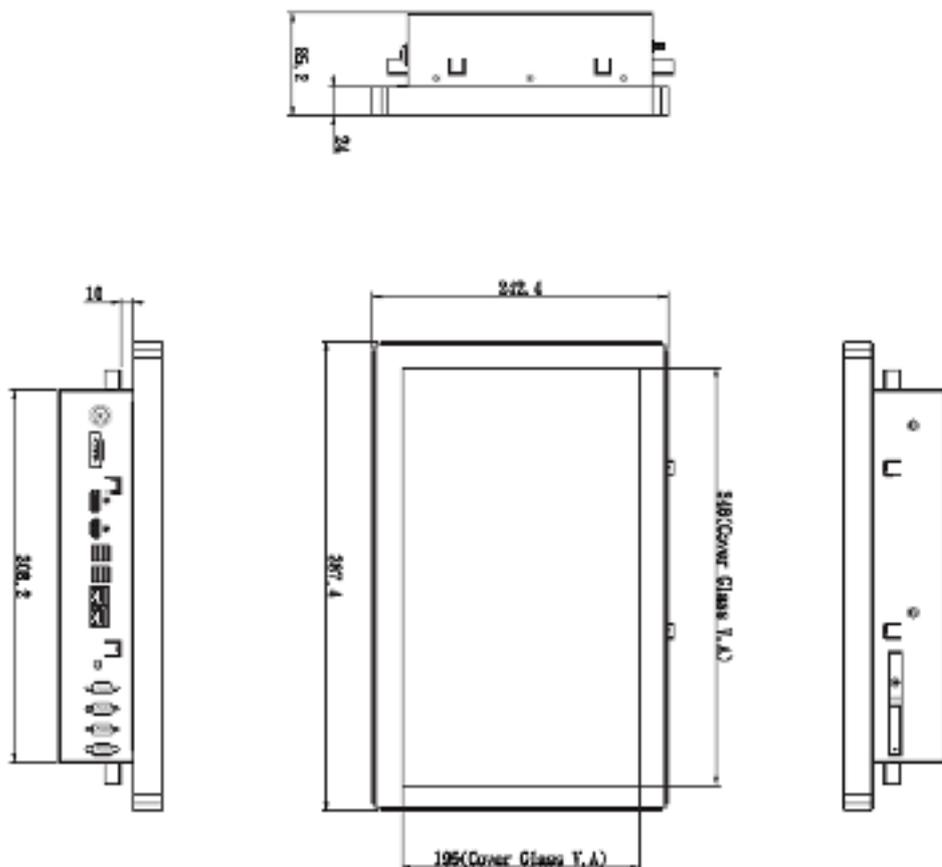

TOLERANCE		REV	DATE	REVISION	NAME	ID
Form - Hole	± 0.1	MATERIAL		APPROVED		LPC-3
Form - Hole	± 0.1	THICKNESS		CHECKED	Brian Smith	DWG NO
Form - Hole	± 0.16	FINISH		DESIGNED	Brian Smith	PART NO
Form - Hole	± 0.2	SCALE	1:2	DRAWN	Brian Smith	
Form - Hole	± 0.3	UNIT	mm	PROJECT		
Form - Hole	± 0.3					
Form - Hole	± 0.5					

ELGENS

LPC-P185W-1X Drawing

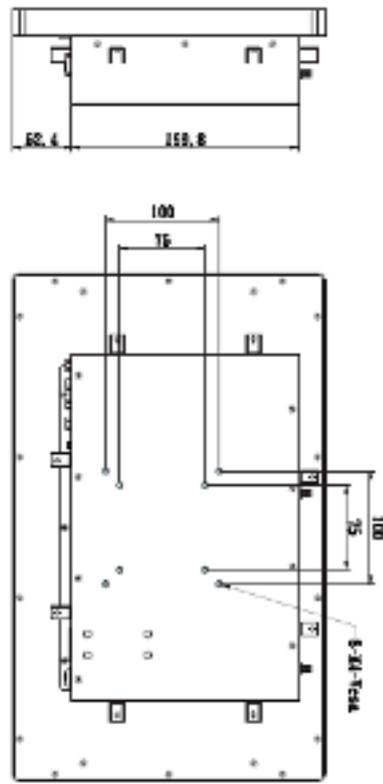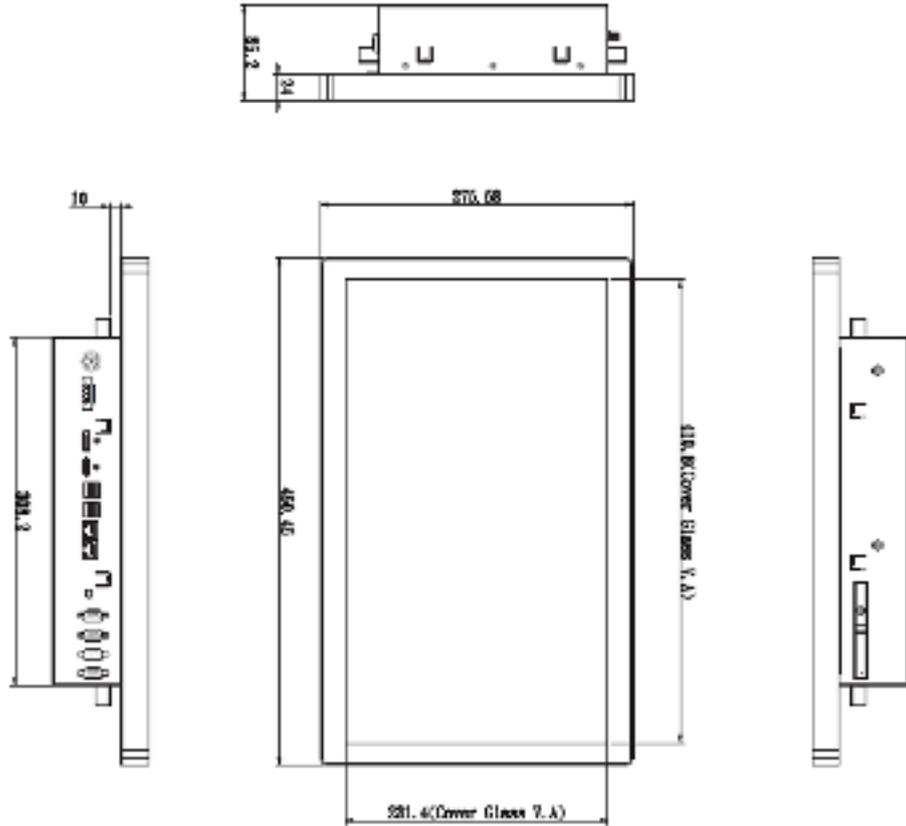

REVISIONS		DATE		REASON	

DATE	BY	CHKD.	DATE	REVISION	DESCRIPTION



ITEM	QTY	UNIT	DESCRIPTION

NO.	DESCRIPTION	DATE	BY	CHKD.

NO.	DESCRIPTION	DATE	BY	CHKD.

ELGENS



LPC-P190S-1X Drawing

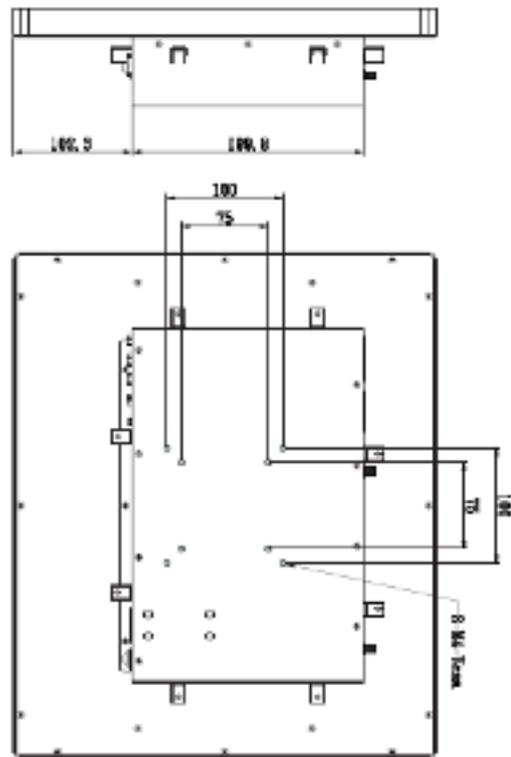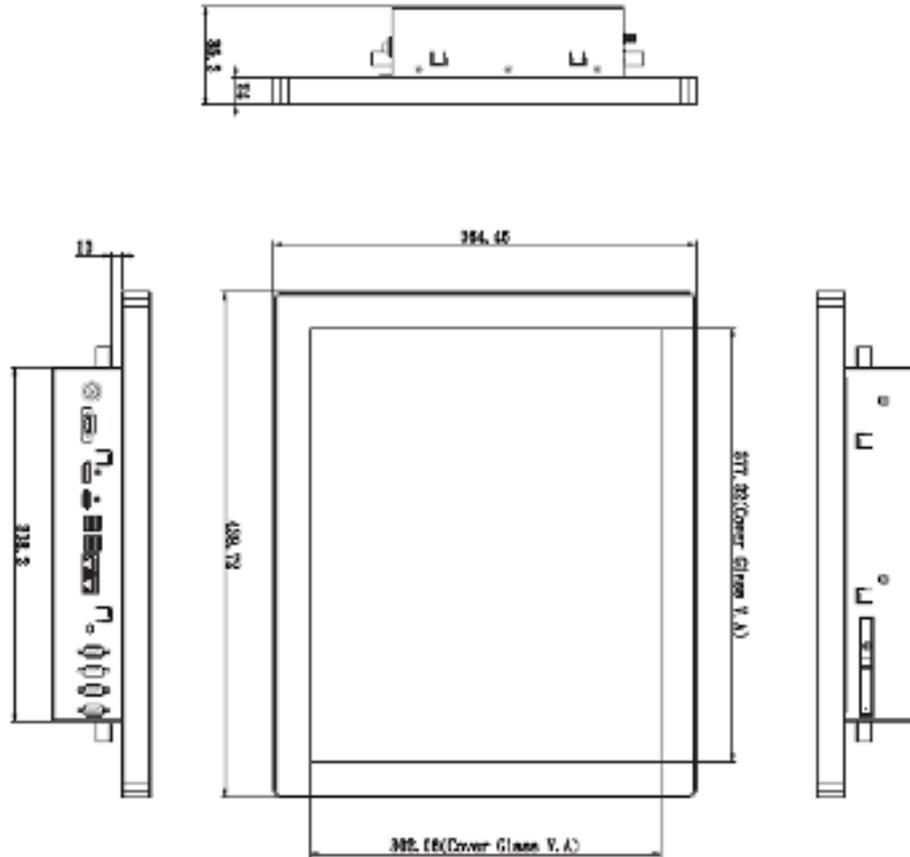

TOLERANCES		MATERIAL		APPROVED		REVISION		SCALE		ID Drawing	
Dim	±	Dim	±	Checked	Checked	By	Date	Scale	Part No	Rev	Part No
Dim 1-6mm	±0.1	Material									
Dim 6-30mm	±0.1	Finishes									
Dim 30-120mm	±0.15	Process									
Dim 120-150mm	±0.2	Scale	1:5	Product							
Dim 150mm	±0.3	Unit	mm	Project							
ASSEMBLY	±0.5	Unit	mm	Project							

ELGENS

LPC-P215W-1X Drawing

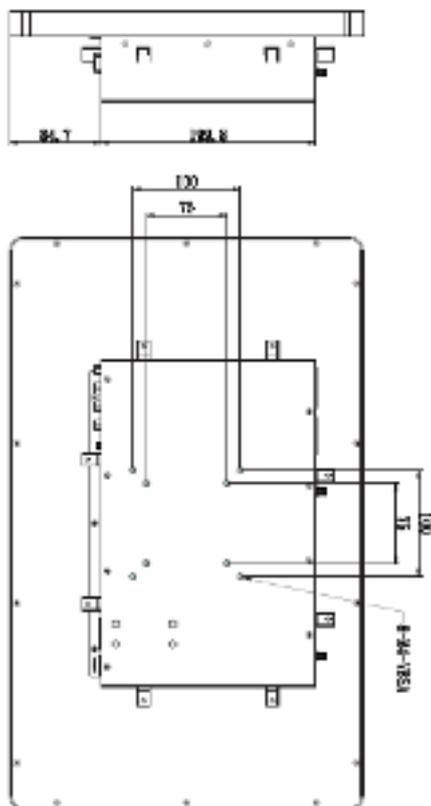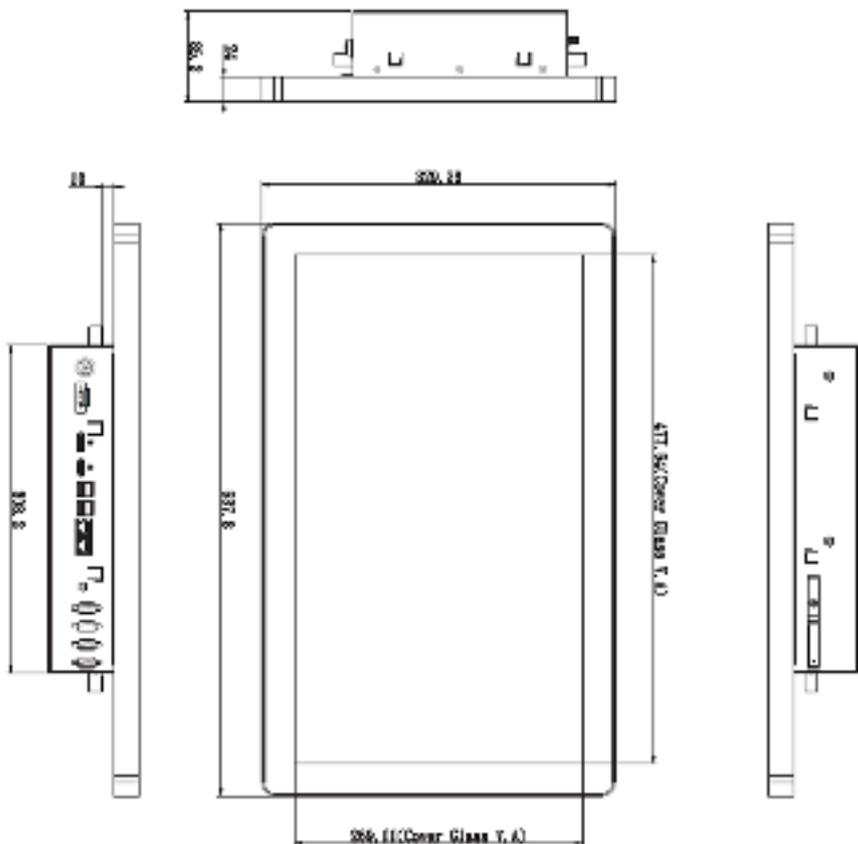


REVISIONS		REV	DATE	DESCRIPTION	BY	CHKD
1	Issue 1	1	11/11/11	INITIAL		
2	Issue 2	2	11/11/11	REVISION		
3	Issue 3	3	11/11/11	SCALE 1:2		
4	Issue 4	4	11/11/11	PROJECT		
5	Issue 5	5	11/11/11	UNIT		

DATE	BY	CHKD	DESCRIPTION	DATE	BY	CHKD
			APPROVED			
			DESIGNED			
			DRAWN			
			DATE CHECKED			
			DATE CHECKED			
			DATE CHECKED			

ELGENS


1.4 General Rear IO Placement

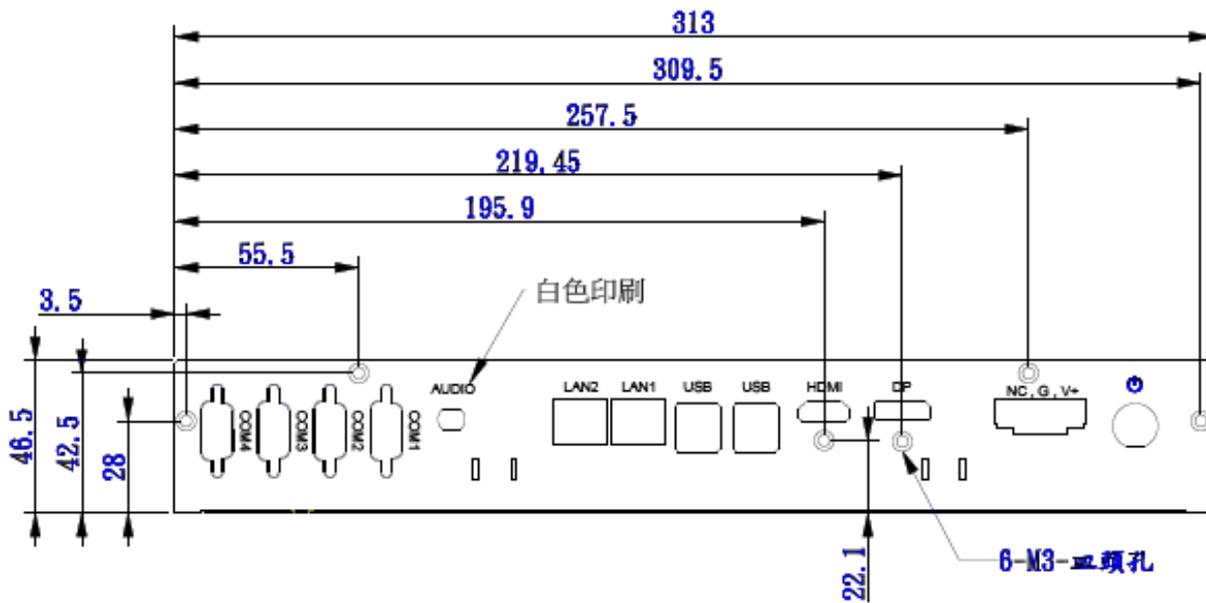


COM 1 is default RS-485 as below pin definition, adjustable to RS-RS232/422 by BIOS.

Pin No	Color	RS-232	RS-422	RS-485
1	Brown	DCD	422 TXD	485 TXD
2	Red	SIN	422 TXD+	485 TXD+
3	Orange	SOJT	422 RXD+	NC
4	Yellow	DTR	422 RXD-	NC
5	Black	GND	GND	GND
6	Green	DSR	NC	NC
7	Blue	RTS	NC	NC
8	Purple	CTS	NC	NC
9	Grey	VCC COM1	NC	NC

COM 1




Power input terminal block pin definition is as below.

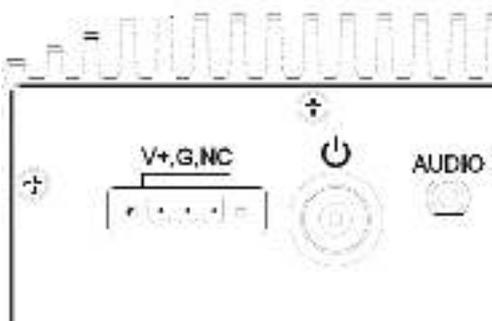

1.5 Front View of LPC- Pcap Series



1.6 Rear View of LPC- Pcap Series

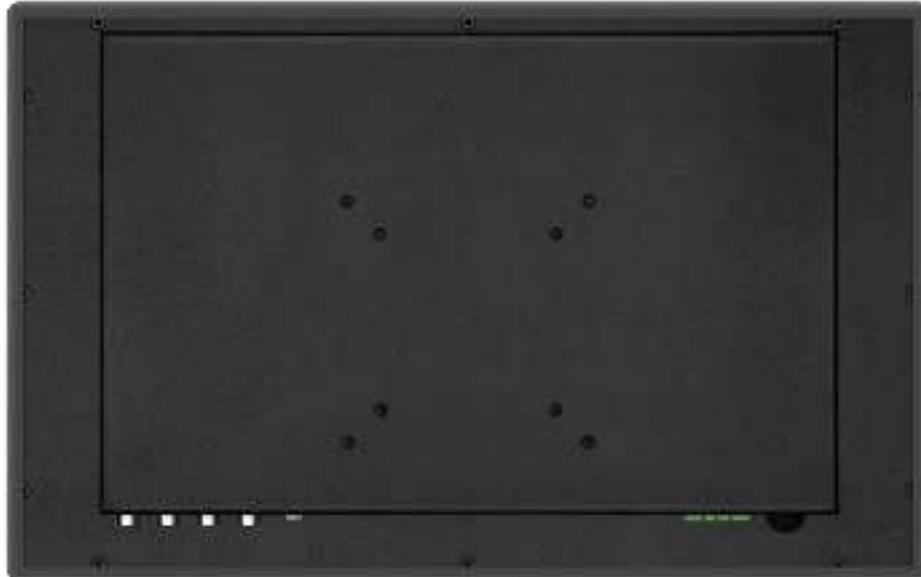

1.7 IO View



1.8 Installation of HDD



This chapter provides information on the BIOS Setup program and allows users to configure the system for optimal use.

Users may need to run the Setup program when:

- An error message appears on the screen at system startup and requests users to run SETUP.
- Users want to change the default settings for customized features.

Important

- Please note that BIOS update assumes technician-level experience.
- As the system BIOS is under continuous update for better system performance, the illustrations in this chapter should be held for reference only.

2.1 Entering Setup

Power on the computer and the system will start POST (Power On Self Test) process. When the message below appears on the screen, press or <F2> key to enter Setup.

Press or <F2> to enter SETUP

If the message disappears before you respond and you still wish to enter Setup, restart the system by turning it OFF and On or pressing the RESET button. You may also restart the system by simultaneously pressing <Ctrl>, <Alt>, and <Delete> keys.

Important

The items under each BIOS category described in this chapter are under continuous update for better system performance. Therefore, the description may be slightly different from the latest BIOS and should be held for reference only.

Control Keys

← →	Select Screen
↑ ↓	Select Item
Enter	Select
+ -	Change Option
F1	General Help
F7	Previous Values
F9	Optimized Defaults
F10	Save & Reset
Esc	Exit

Getting Help

After entering the Setup menu, the first menu you will see is the Main Menu.

Main Menu

The main menu lists the setup functions you can make changes to. You can use the arrow keys (↑↓) to select the item. The on-line description of the highlighted setup function is displayed at the bottom of the screen.


Sub-Menu

If you find a right pointer symbol appears to the left of certain fields that means a sub-menu can be launched from this field. A sub-menu contains additional options for a field parameter. You can use arrow keys (↑↓) to highlight the field and press <Enter> to call up the sub-menu. Then you can use the control keys to enter values and move from field to field within a sub-menu. If you want to return to the main menu, just press the <Esc >.

General Help <F1>

The BIOS setup program provides a General Help screen. You can call up this screen from any menu by simply pressing <F1>. The Help screen lists the appropriate keys to use and the possible selections for the highlighted item. Press <Esc> to exit the Help screen.

2.2 The Menu Bar

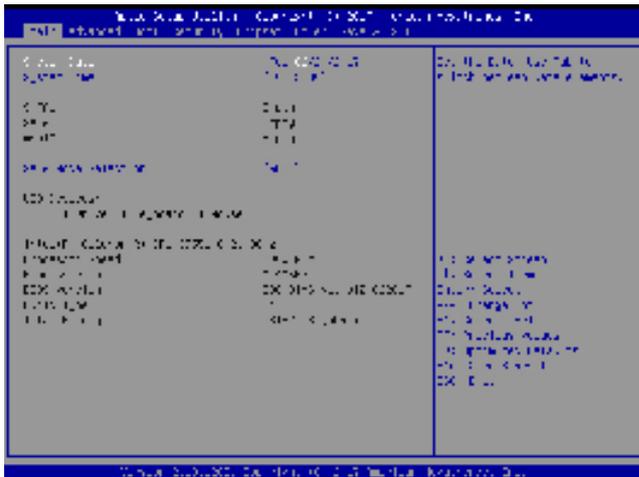

► Main

Use this menu for basic system configurations, such as time, date, etc.

► Advanced

Use this menu to set up the items of special enhanced features.

► Boot

Use this menu to specify the priority of boot devices.

► Security

Use this menu to set supervisor and user passwords.

► Chipset

This menu controls the advanced features of the onboard chipsets.

► Power

Use this menu to specify your settings for power management.

► Save & Exit

This menu allows you to load the BIOS default values or factory default settings into the BIOS and exit the BIOS setup utility with or without changes.

▶ CPU Configuration



▶ Intel Virtualization Technology

Virtualization enhanced by Intel Virtualization Technology will allow a platform to run multiple operating systems and applications in independent partitions. With virtualization, one computer system can function as multiple “Virtual” systems.

▶ Active Processor Cores

This setting specifies the number of active processor cores.

▶ Execute Disable Bit

Intel’s Execute Disable Bit functionality can prevent certain classes of malicious “buffer overflow” attacks when combined with a supporting operating system. This functionality allows the processor to classify areas in memory by where application code can execute and where it cannot. When a malicious worm attempts to insert code in the buffer, the processor disables code execution, preventing damage or worm propagation.

▶ Intel SpeedStep

EIST (Enhanced Intel SpeedStep Technology) allows the system to dynamically adjust processor voltage and core frequency, which can result in decreased average power consumption and decreased average heat production. When disabled, the processor will return the actual maximum CPUID input value of the processor when queried.

▶ C-States

This setting controls the C-States (CPU Power states).

► Super IO Configuration



► Serial Port 1/ 2/ 3/ 4/ 5/ 6

This setting enables/disables the specified serial port.

► Change Settings

This setting is used to change the address & IRQ settings of the specified serial port.

► Mode Select

Select an operation mode for the specified serial port.

► Watch Dog Timer

You can enable the system watch-dog timer, a hardware timer that generates a reset when the software that it monitors does not respond as expected each time the watch dog polls it.

► FIFO Mode

This setting controls the FIFO data transfer mode.

► Shared IRQ Mode

This setting provides the system with the ability to share interrupts among its serial ports.

▶ H/W Monitor

These items display the current status of all monitored hardware devices/ components such as voltages, temperatures and all fans' speeds.



▶ Smart Fan Configuration



▶ SYSFAN1

This setting enables/disables the Smart Fan function. Smart Fan is an excellent feature which will adjust the CPU/system fan speed automatically depending on the current CPU/system temperature, avoiding the overheating to damage your system.

► PCI/PCIE Device Configuration



► Legacy USB Support

Set to [Enabled] if you need to use any USB 1.1/2.0 device in the operating system that does not support or have any USB 1.1/2.0 driver installed, such as DOS and SCO Unix.


► Audio Controller

This setting enables/disables the onboard audio controller.

► Launch OnBoard LAN OpROM

These settings enable/disable the initialization of the onboard/onchip LAN Boot ROM during bootup. Selecting [Disabled] will speed up the boot process.


▶ GPIO Group Configuration

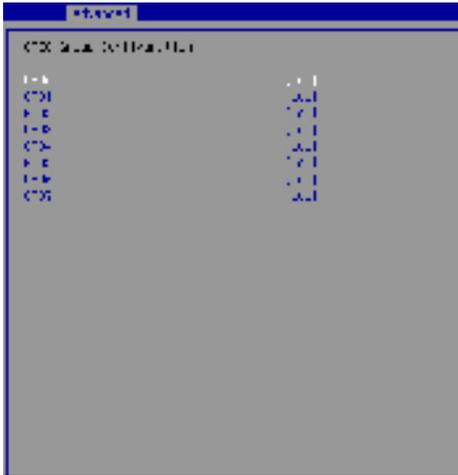

▶ GPIO0 ~ GPIO7

These settings control the operation mode of the specified GPIO.

2.5 Boot

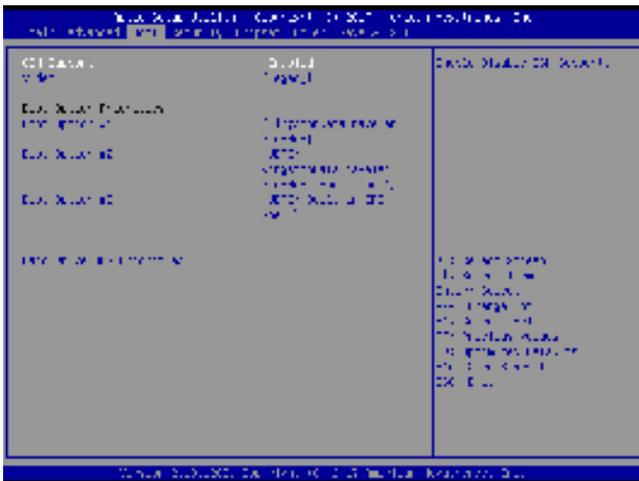

► CSM Support

This setting enables/disables the support for Compatibility Support Module, a part of the Intel Platform Innovation Framework for EFI providing the capability to support legacy BIOS interfaces.

► Video

This setting selects the video mode.

► Boot Option Priorities

This setting allows users to set the sequence of boot devices where BIOS attempts to load the disk operating system.

► Hard Drive BBS Priorities

This setting allows users to set the priority of the specified devices. First press <Enter> to enter the sub-menu. Then you may use the arrow keys (↑ ↓) to select the desired device, then press <+>, <-> or <PageUp>, <PageDown> key to move it up/down in the priority list.

► PCH-FW Configuration



- ME Firmware Version, ME Firmware Mode, ME Firmware SKU, System Integrity Value, ME Firmware Status 1, ME Firmware Status 2, NFC Support

These settings show the firmware information of the Intel ME (Management Engine).

► ME Status

This setting enables/disables the ME status.

► Manageability Features States

This setting specifies the Intel ME Manageability Features.

► AMT BIOS Features

This setting specifies the AMT BIOS Features.

▶ AMT Configuration

Intel Active Management Technology (AMT) is hardware-based technology for remotely managing and securing PCs out-of-band.



▶ ME Unconfig on RTC Clear

This setting enables/disables ME Firmware Un-configure on RTC clear state.

▶ Comms Hub Support

This setting enables/disables Comms Hub Support.


▶ JHI Support

This setting enables/disables JHI Support.

▶ Core BIOS Done Message

This setting enables/disables the Core BIOS Done Message.

► Firmware Update Configuration

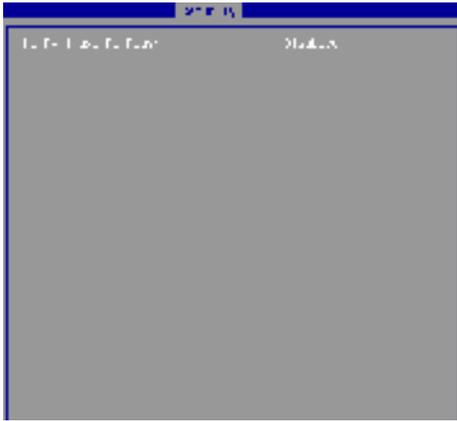

► ME FW Image Re-Flash

This setting enables/disables the ME FW image reflash.

► PTT Configuration

Intel Platform Trust Technology (PTT) is a platform functionality for credential storage and key management used by Microsoft Windows.



▶ Serial Port Console Redirection



▶ Console Redirection

Console Redirection operates in host systems that do not have a monitor and keyboard attached. This setting enables/disables the operation of console redirection. When set to [Enabled], BIOS redirects and sends all contents that should be displayed on the screen to the serial COM port for display on the terminal screen. Besides, all data received from the serial port is interpreted as keystrokes from a local keyboard.

► Console Redirection Settings



► Terminal Type

To operate the system's console redirection, you need a terminal supporting ANSI terminal protocol and a RS-232 null modem cable connected between the host system and terminal(s). This setting specifies the type of terminal device for console redirection.

► Bits per second, Data Bits, Parity, Stop Bits

This setting specifies the transfer rate (bits per second, data bits, parity, stop bits) of Console Redirection.

► Flow Control

Flow control is the process of managing the rate of data transmission between two nodes. It's the process of adjusting the flow of data from one device to another to ensure that the receiving device can handle all of the incoming data. This is particularly important where the sending device is capable of sending data much faster than the receiving device can receive it.

► VT-UTF8 Combo Key Support

This setting enables/disables the VT-UTF8 combination key support for ANSI/VT100 terminals.

► Recorder Mode, Resolution 100x31

These settings enable/disable the recorder mode and the resolution 100x31.

► Legacy OS Redirection Resolution

This setting specifies the redirection resolution of legacy OS.

► Putty Keypad

PuTTY is a terminal emulator for Windows. This setting controls the numeric keypad for use in PuTTY.

► Redirection After BIOS POST

This setting determines whether or not to keep terminals' console redirection running after the BIOS POST has booted.

2.7 Chipset



▶ DVMT Pre-Allocated

This setting defines the DVMT pre-allocated memory. Pre-allocated memory is the small amount of system memory made available at boot time by the system BIOS for video. Pre-allocated memory is also known as locked memory. This is because it is "locked" for video use only and as such, is invisible and unable to be used by the operating system.

▶ DVMT Total Gfx Mem

This setting specifies the memory size for DVMT.

▶ Primary IGFX Boot Display

Use the field to select the type of device you want to use as the displays of the system.

▶ LVDS

This setting enables/disables LVDS.


▶ LCD Panel Type

This setting specifies the LCD panel type.

▶ LCD Backlight Control

This setting controls the LVDS backlight.

2.8 Power

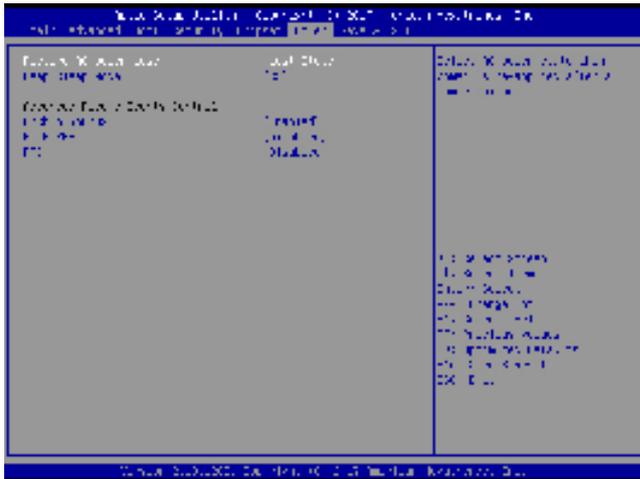

► Restore AC Power Loss

This setting specifies whether your system will reboot after a power failure or interrupt occurs. Available settings are:

[Power Off]	Leaves the computer in the power off state.
[Power On]	Leaves the computer in the power on state.
[Last State]	Restores the system to the previous status before power failure or interrupt occurred.

► Deep Sleep Mode

The setting enables/disables the Deep S5 power saving mode. S5 is almost the same as G3 Mechanical Off, except that the PSU still supplies power, at a minimum, to the power button to allow return to S0. A full reboot is required. No previous content is retained. Other components may remain powered so the computer can “wake” on input from the keyboard, clock, modem, LAN, or USB device.

**** Advanced Resume Events Control ****

▶ Onchip GbE / USB

The item allows the activity of the OnChip GbE/USB device to wake up the system from S3/S4 sleep state.

▶ PCIE PME

This field specifies whether the system will be awakened from power saving modes when activity or input signal of onboard PCIE PME is detected.

▶ RTC

When [Enabled], you can set the date and time at which the RTC (real-time clock) alarm awakens the system from suspend mode.

2.9 Save & Exit



- ▶ Save Changes and Reset

Save changes to CMOS and reset the system.

- ▶ Discard Changes and Exit

Abandon all changes and exit the Setup Utility.

- ▶ Discard Changes

Abandon all changes.

- ▶ Load Optimized Defaults

Use this menu to load the default values set by the motherboard manufacturer specifically for optimal performance of the motherboard.

- ▶ Save as User Defaults

Save changes as the user's default profile.

- ▶ Restore User Defaults

Restore the user's default profile.

- ▶ Launch EFI Shell from filesystem device

This setting helps to launch the EFI Shell application from one of the available file system devices.

Chapter 3 USB 3.0 driver installation

SOP of USB 3.0 driver installation prior to Win 7 by Smart kit

Purpose:

The original Windows 7 is incompatible with USB 3.0, the program “MSI Smart Tool Kits” will help you to compile USB 3.0 driver into your original Windows 7, in order to avoid the system failure when you install OS. This tool can make your own bootable Windows 7 USB from your original Windows 7 disk.

Things need to prepare:

Prepare your Windows 7 DVD, and an USB disk at least 8Gb

Put the DVD in the DVD-ROM and plug USB into your computer.


Please download “MSI Smart Tool Kits” from the website below:

<https://drive.google.com/drive/u/0/folders/0B0ap8HaD1zCCOU5sN2cyZ1JMSjQ>

MSI Smart Tool Kits

1. Click “Source folder” choose the location of your Windows 7 disc.
2. Choose “USB storage” as bootable USB for your Windows 7
3. Click “Start”
4. Click “YES”




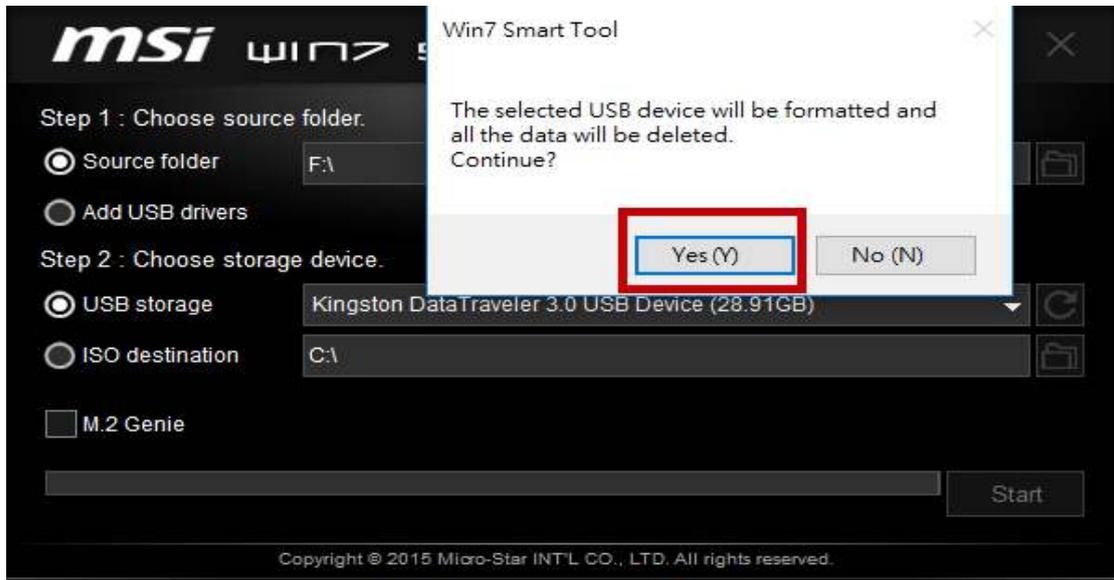

Once the status bar reach to 100%, withdraw the USB device and done.

Step A .


- A-1.** Plug your modified USB to USB 3.0 port, and keyboard
- A-2.** Then turn on the LPC series press “Delete” to enter BIOS mode,
- A-3.** In BIOS mode, go to “Boot” page and select “Hard Drive BBS Priorities”

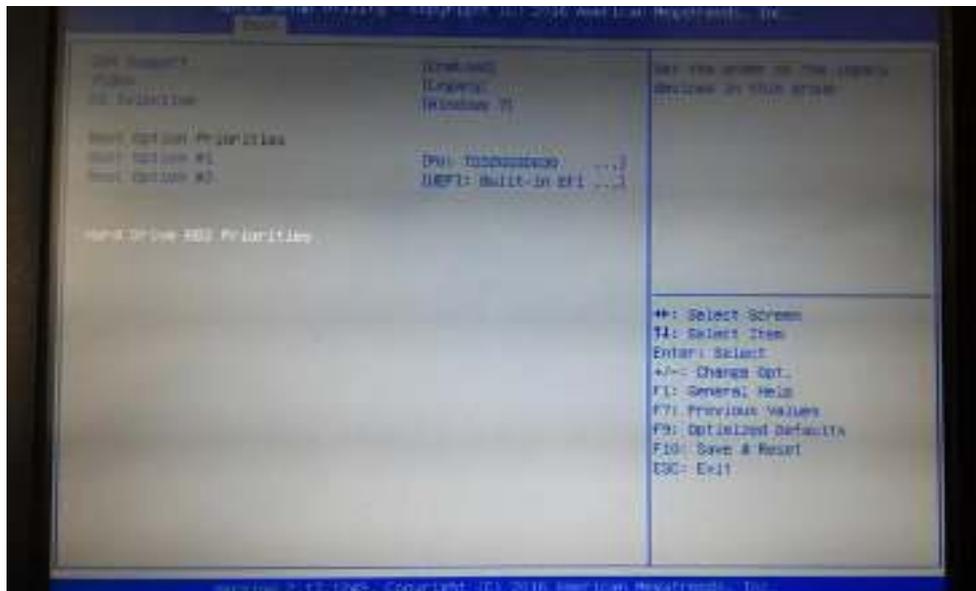

Chapter 4 Installation Drivers

4.1 Chipset Driver Installation

- 4.1.1. Select Chipset folder and execute "Setupchipset.exe"
- 4.1.2. Please follow the red blank.

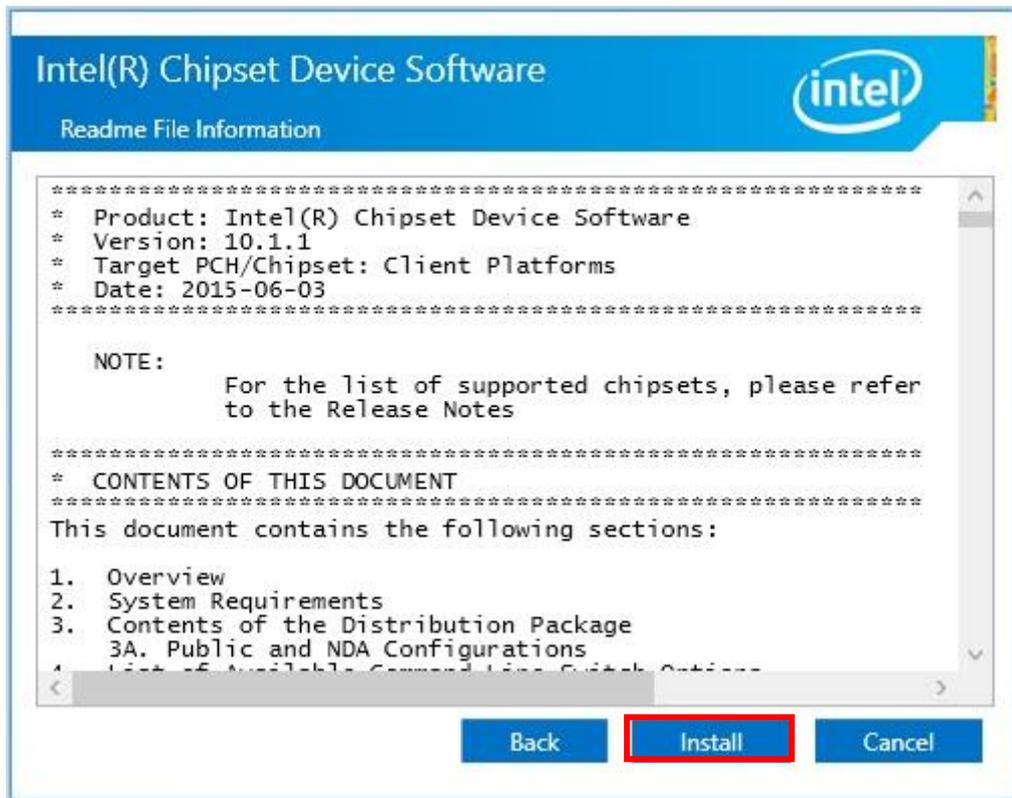



Intel(R) Chipset Device Software



Completion

You have successfully installed the following product:

Intel(R) Chipset Device Software

You must restart this computer for the changes to take effect.



[View Log Files](#)



Restart Now

Restart Later

4.2 Graphics Driver Setup

- 4.2.1. Select “ Graphics\4678\win64” folder and execute “Setup.exe”
- 4.2.2. Please follow the red blank.

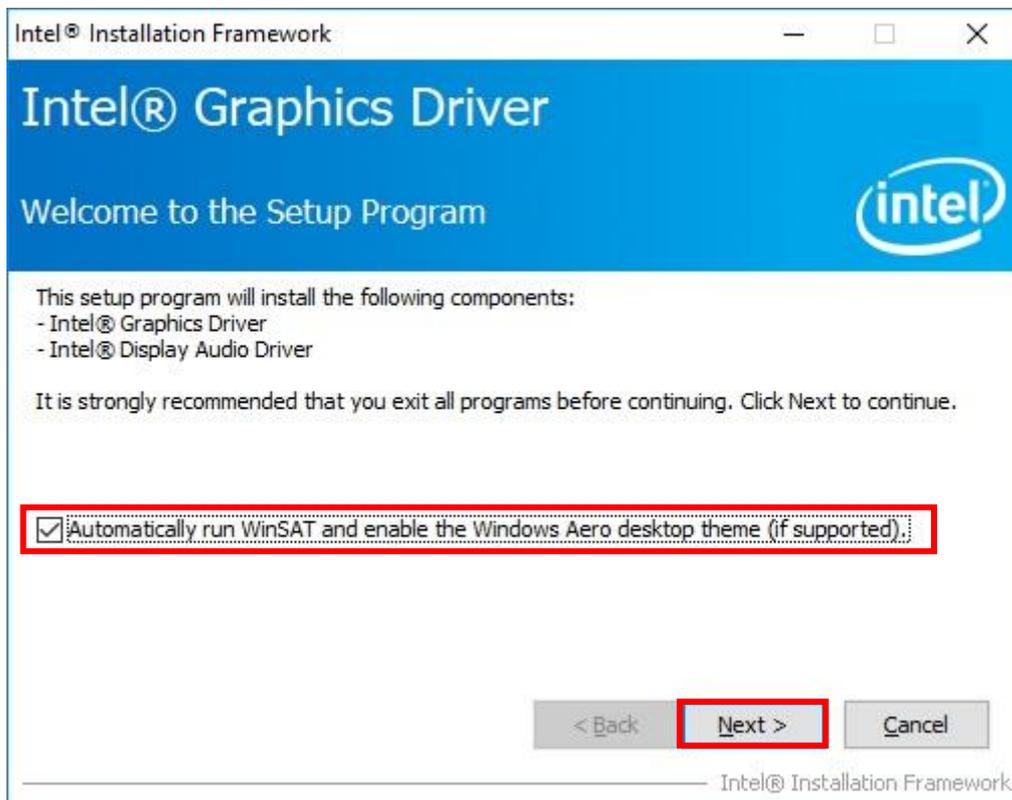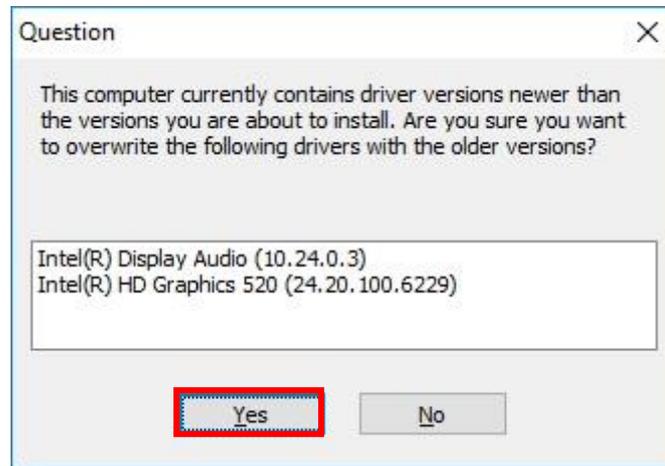

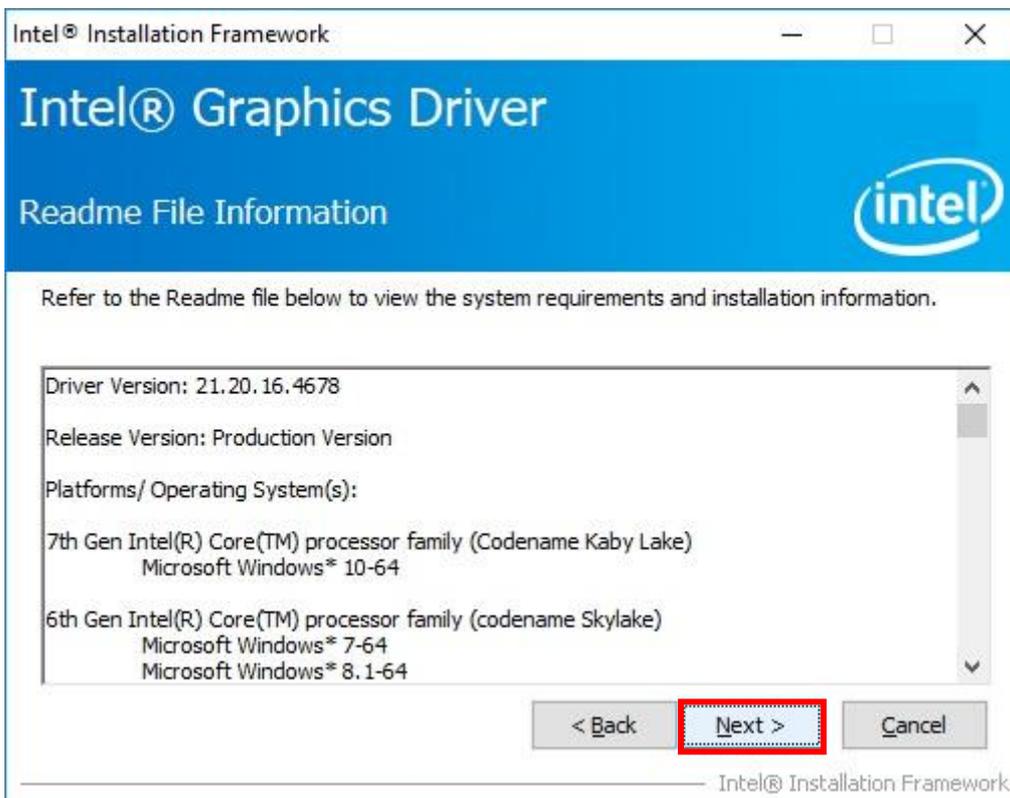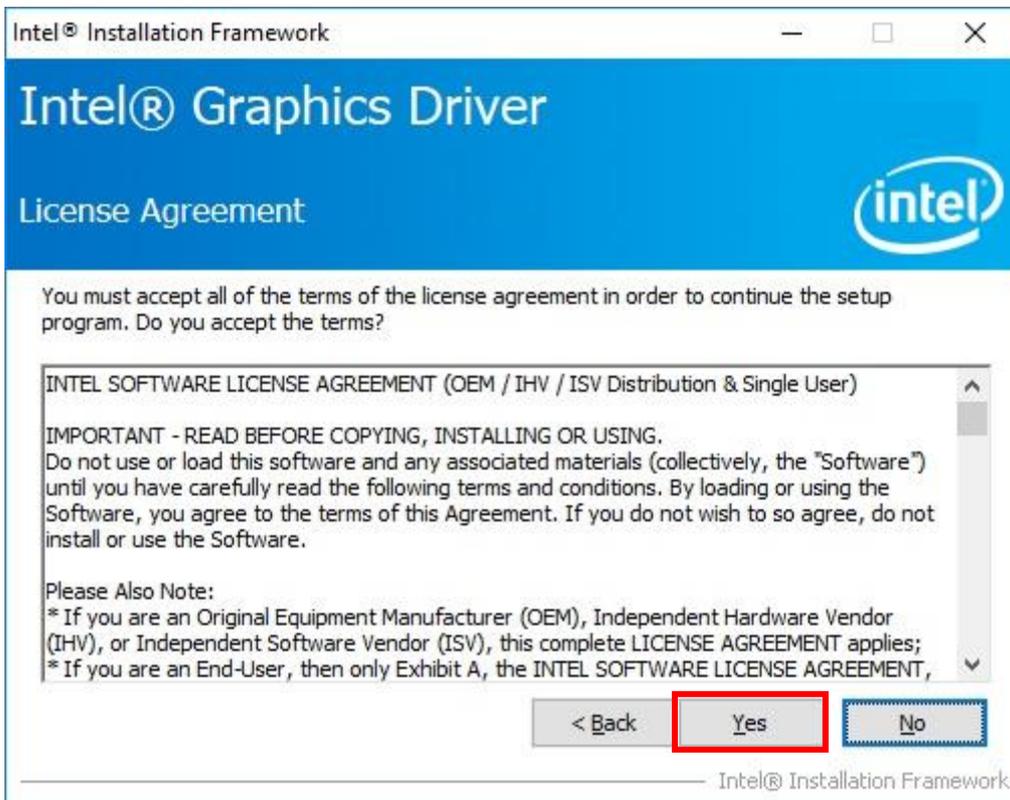

Intel® Graphics Driver

Setup Progress



Please wait while the following setup operations are performed:

```
Creating Process: C:\Program Files (x86)\Intel\Intel(R) Processor Graphics\uninstall\UninstallVulka
Installing Driver: Intel(R) Display Audio
Version: 10.22.1.100
```

```
••
```

Next >

Intel® Graphics Driver

Setup Progress




Please wait while the following setup operations are performed:

```
Deleting File: C:\ProgramData\Microsoft\Windows\Start Menu\Programs\Intel(R) Graphics and
Deleting File: C:\ProgramData\Microsoft\Windows\Start Menu\Programs\Intel\Intel(R) Graphic
Deleting File: C:\Users\Public\Desktop\Intel(R) HD Graphics Control Panel.lnk
Deleting File: C:\Users\Public\Desktop\Intel(R) Graphics and Media Control Panel.lnk
Deleting File: C:\ProgramData\Microsoft\Windows\Start Menu\Programs\Intel\Intel(R) Iris(TM)
Deleting File: C:\ProgramData\Microsoft\Windows\Start Menu\Programs\Intel(R) Iris(TM) Grap
Deleting File: C:\Users\Public\Desktop\Intel(R) Iris(TM) Graphics Control Panel.lnk
Deleting File: C:\Users\Public\Desktop\Intel\Intel(R) Iris(TM) Graphics Control Panel.lnk
Deleting Registry Key: HKLM\SOFTWARE\Intel\GFX\Internal\AudioFix
Deleting Registry Key: HKLM\SOFTWARE\Intel\GFX\Internal\AudioFix
```

Click Next to continue.

```
< >
```

Next >

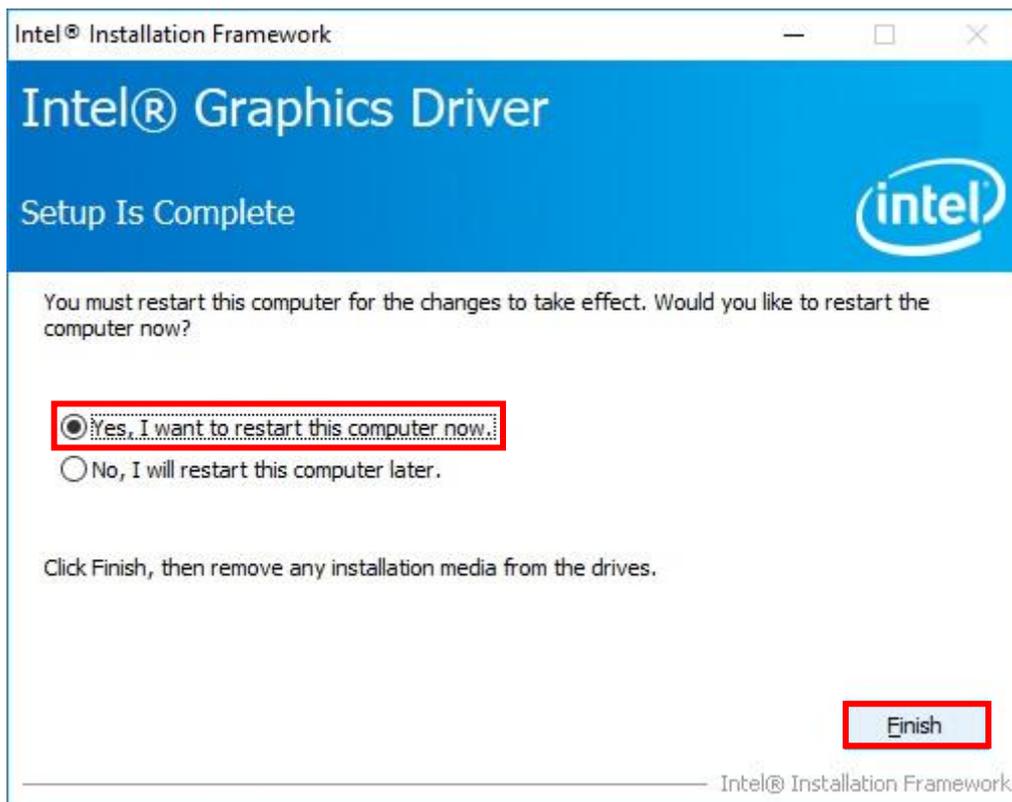

4.3 Audio Driver Setup

- 4.3.1. Select "Audio\8010_PG454_Win10_TH_RS_Win8.1_Win8_Win7_WHQL" folder and execute "Setup.exe"
- 4.3.2. Please follow the red blank.



Welcome to the InstallShield Wizard for Realtek High Definition Audio Driver



The InstallShield Wizard will install Realtek High Definition Audio Driver on your computer. To continue, click Next.

InstallShield

< Back



Next >



Cancel

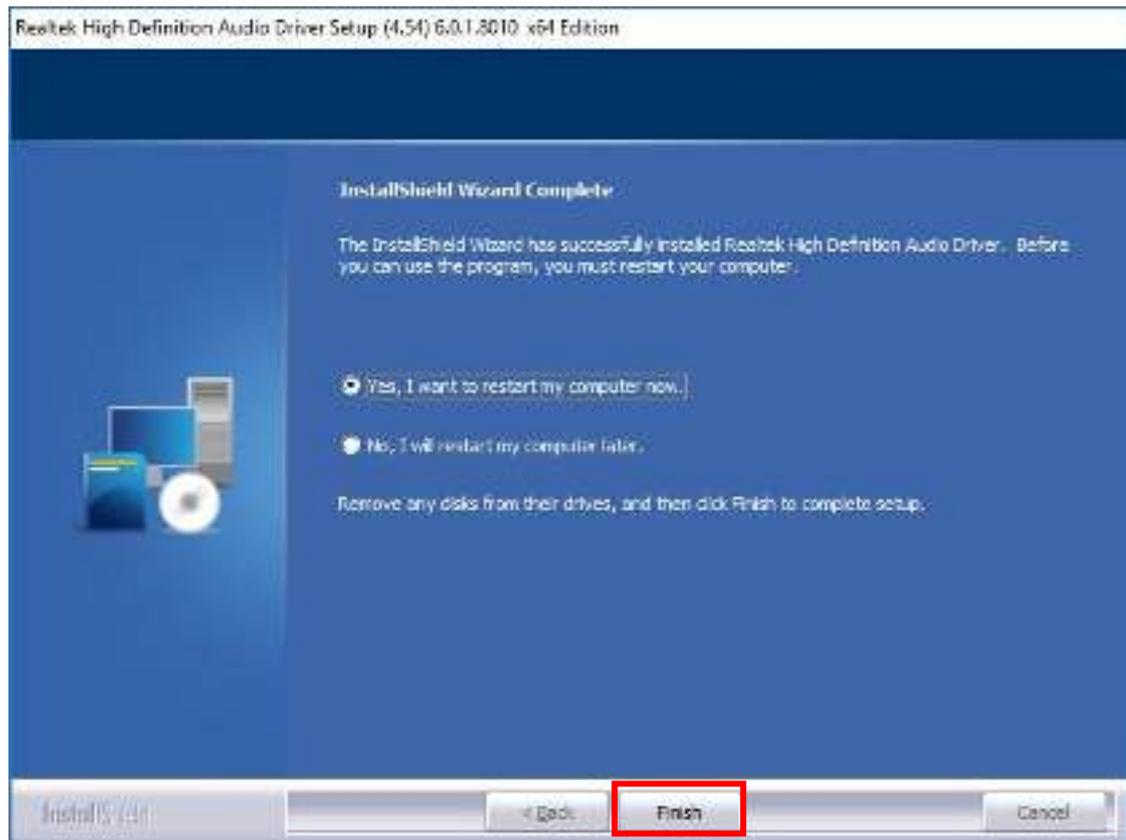
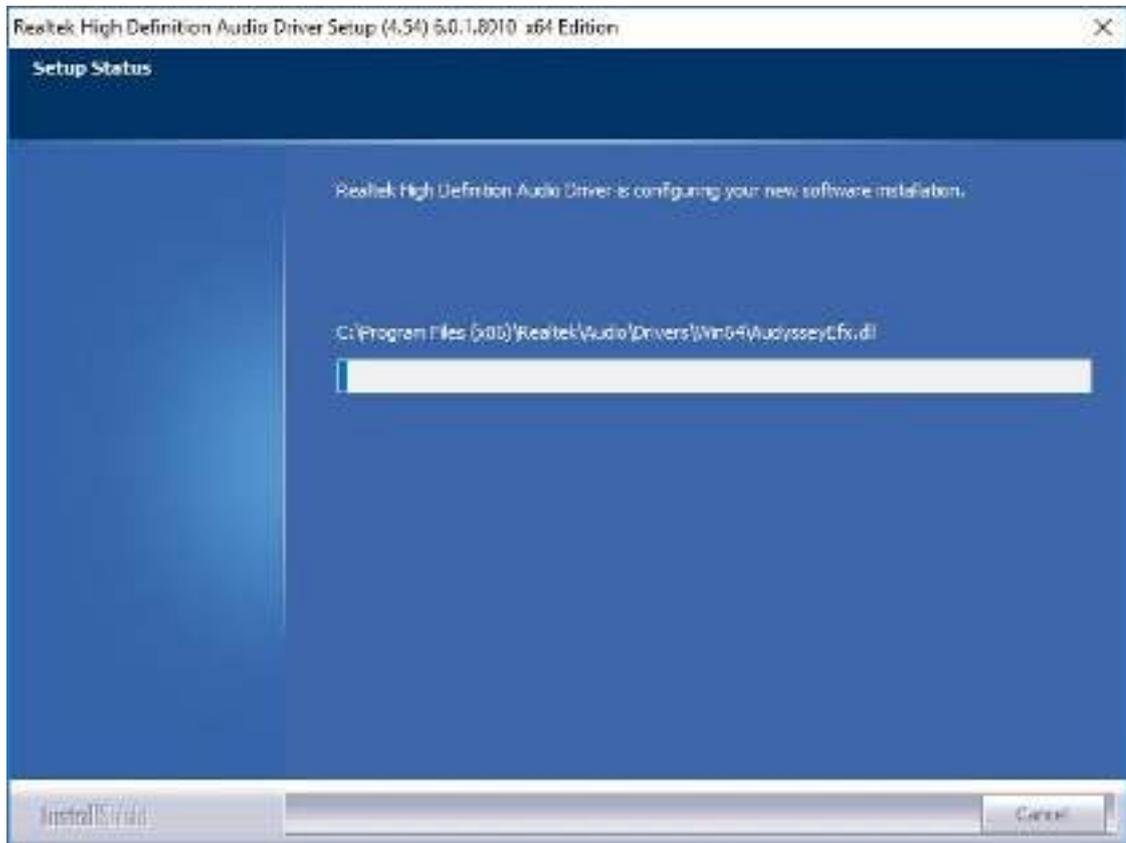


4.4 LAN Driver Setup

- 4.4.1. Go to LAN file and choose 32 bits or 64 bits " Setup.exe"
- 4.4.2. Please follow the red blank.

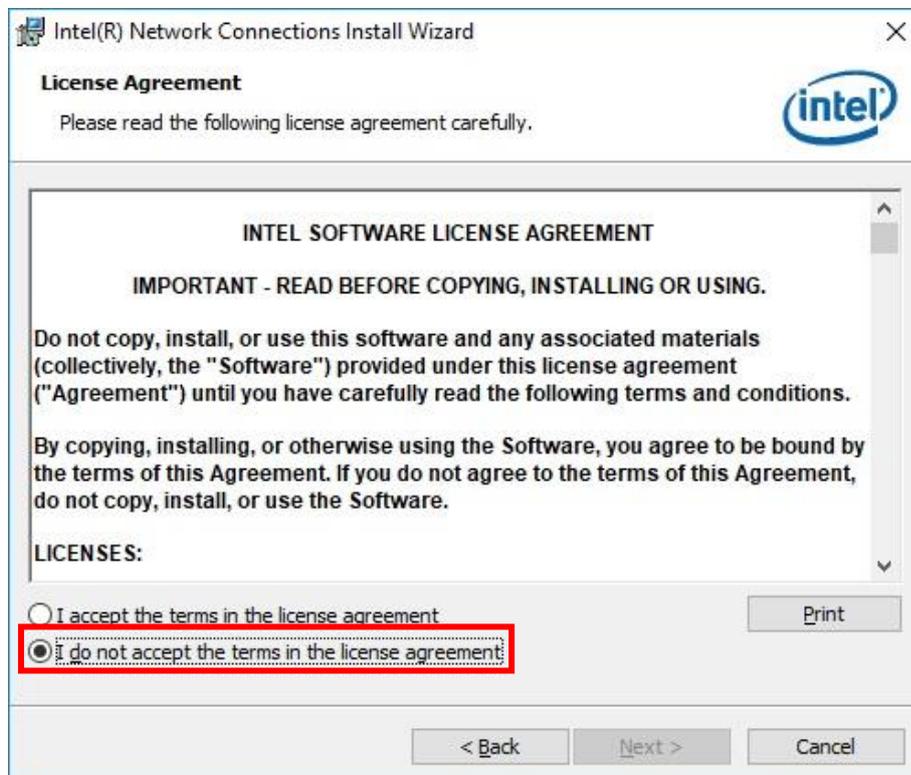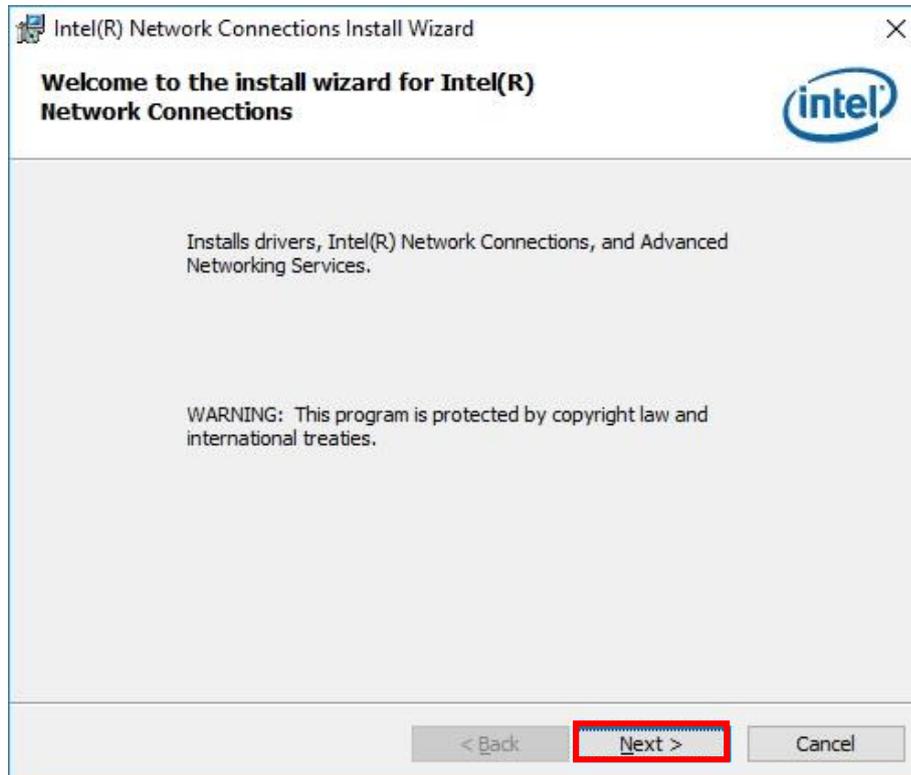

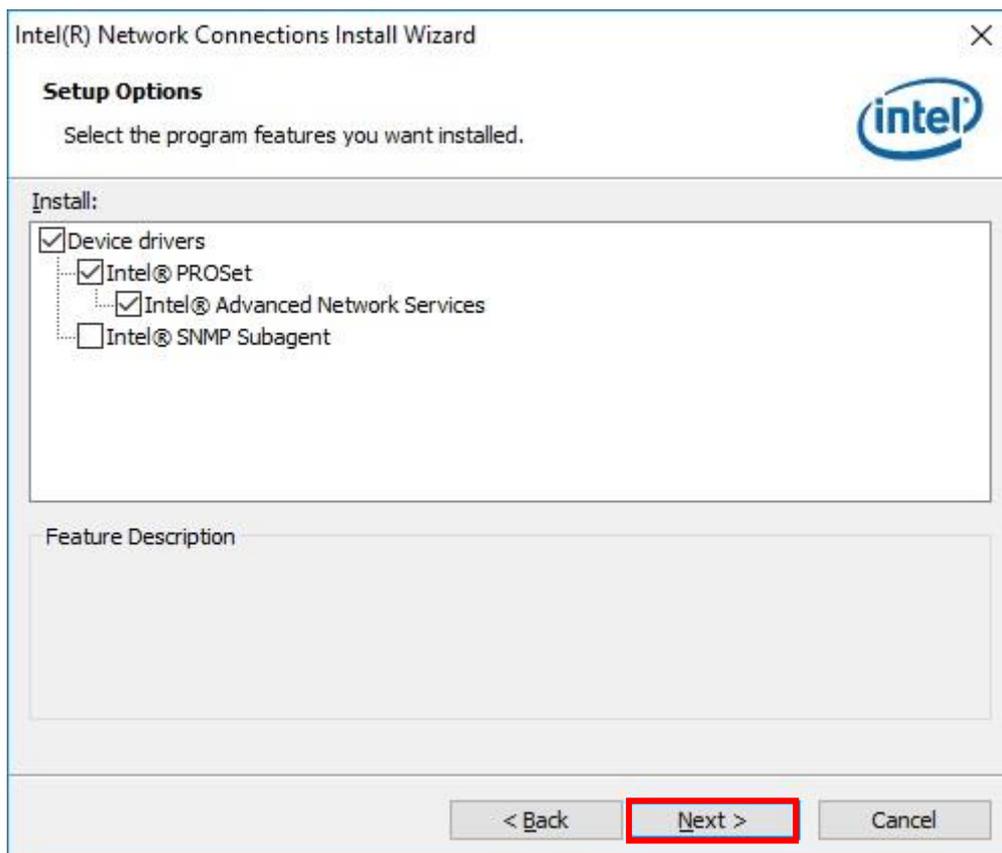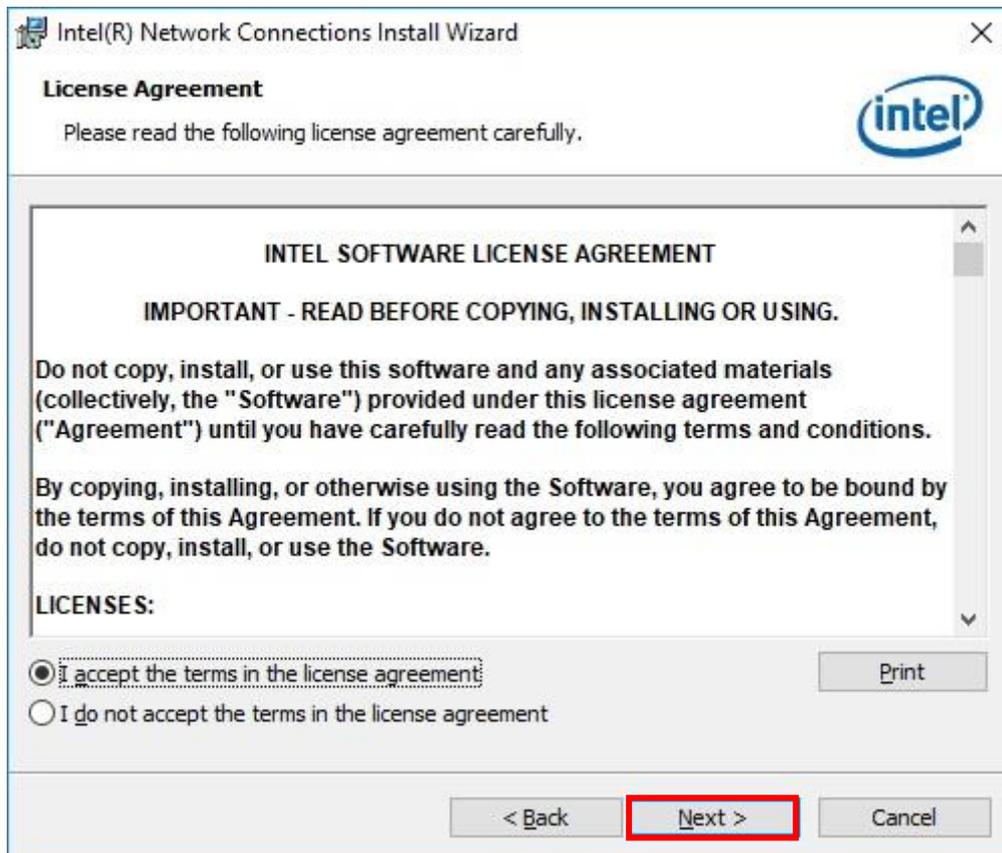


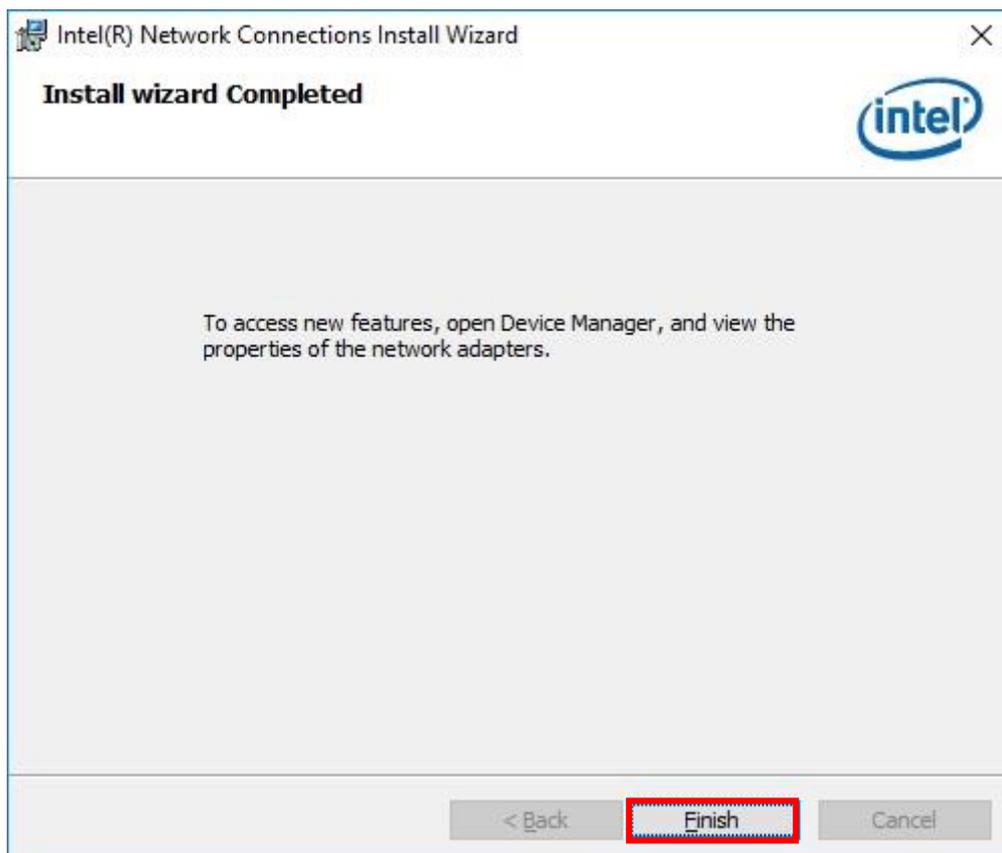
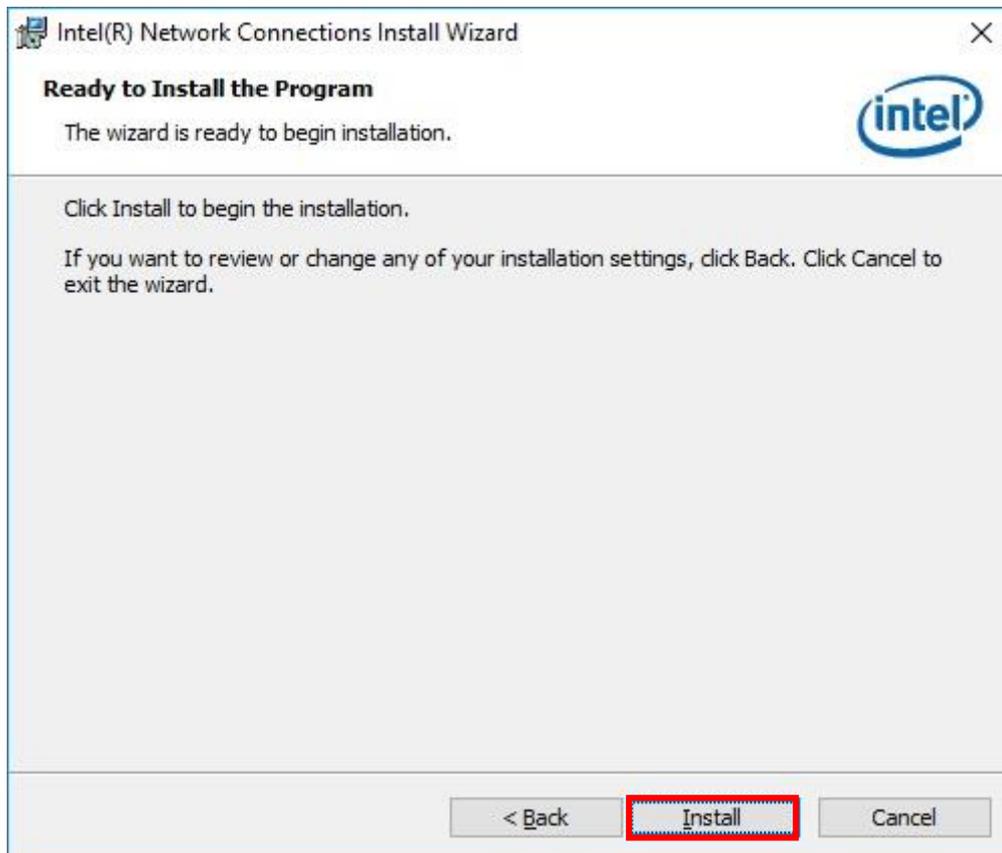


4.5 SIO Driver Setup

- 4.5.1. Go to “SIO\30.100.1713.2” and Choose “SetupSerialIO”
- 4.5.2. Please follow the red blank.



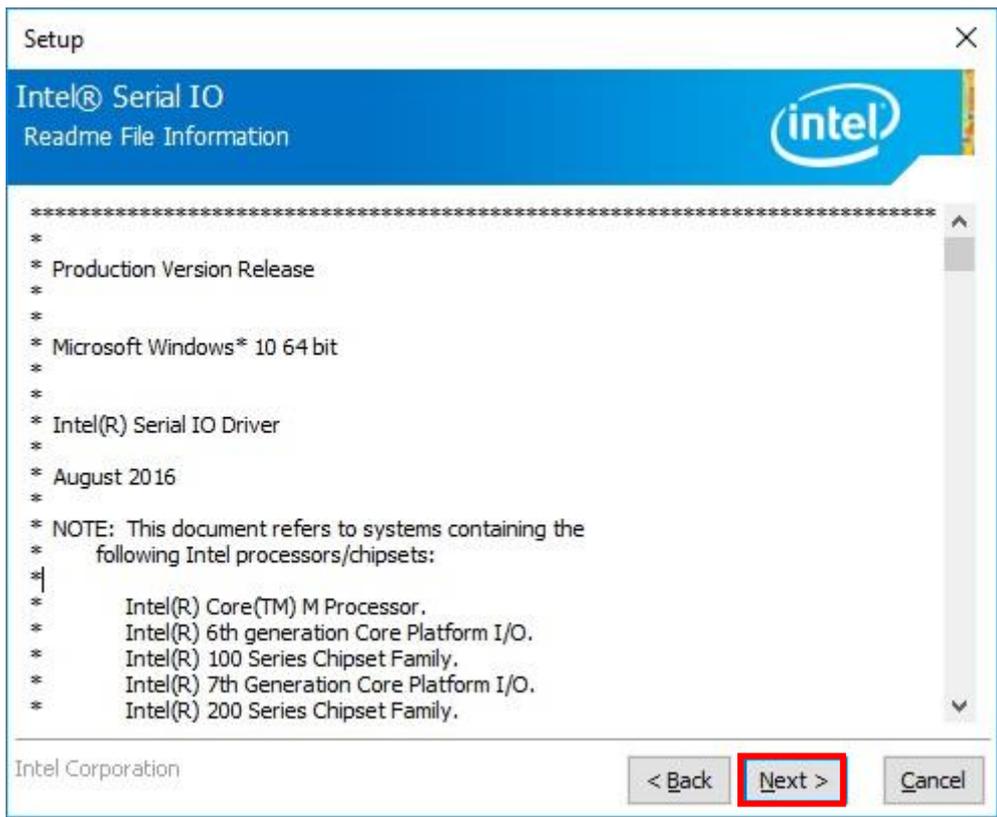

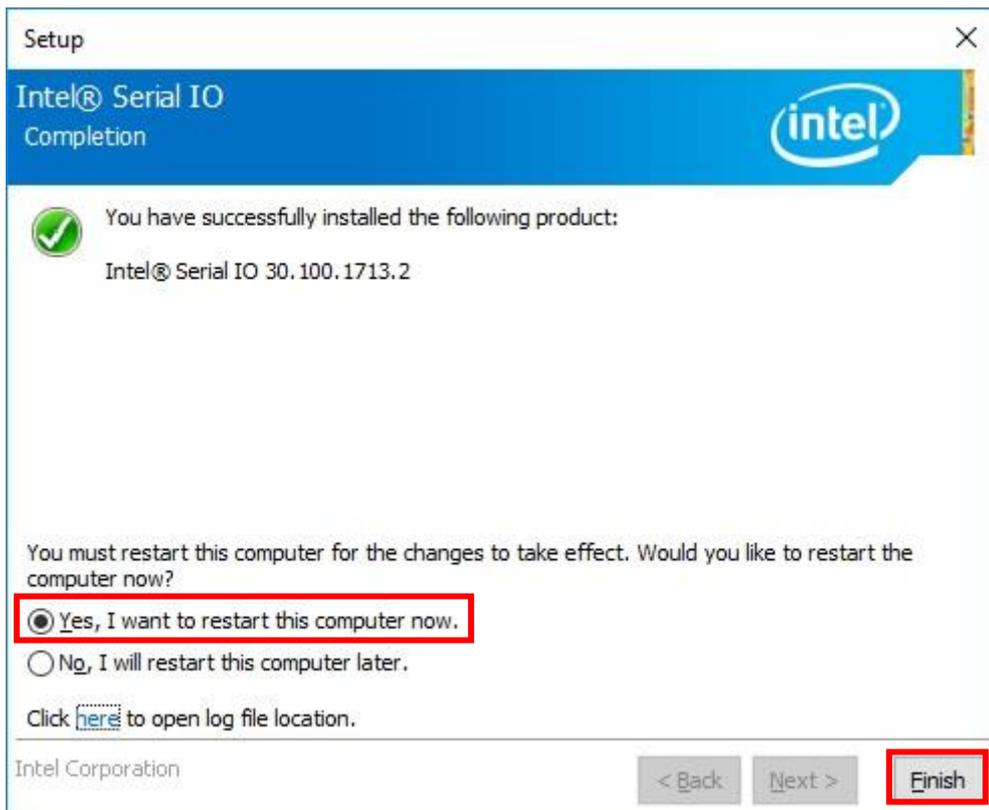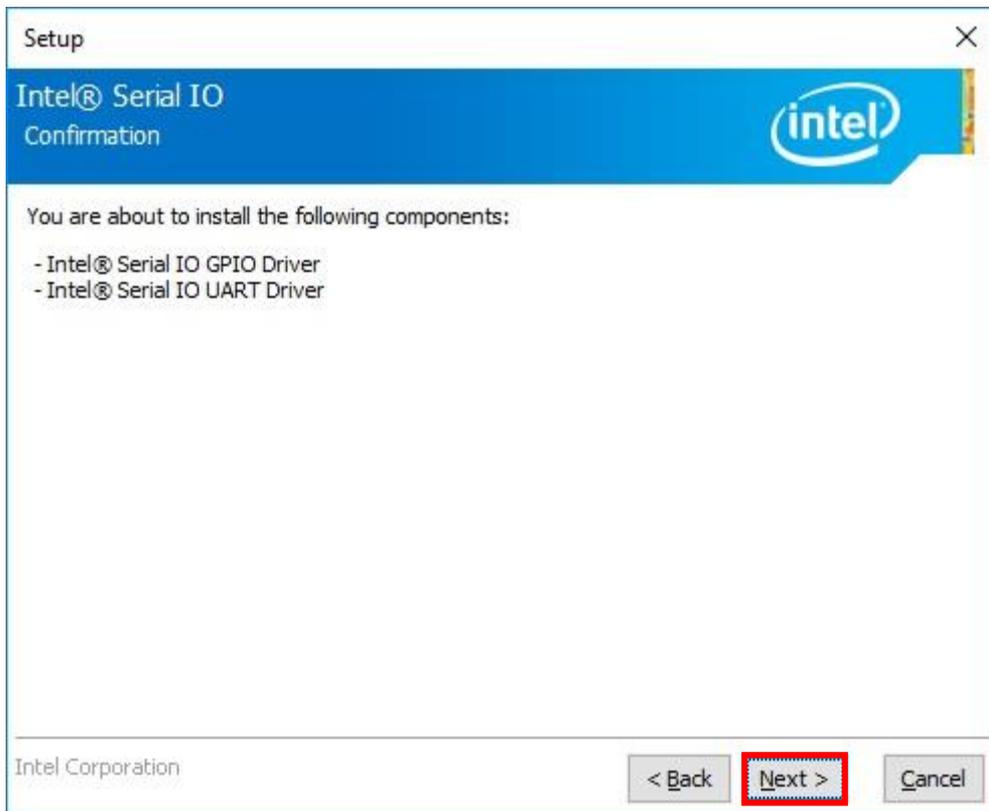

4.6 ME Driver Setup

- 4.6.1. Go to "AMT11.6\ME11.6_corp_11.6.50.1213"E "and choose "SetupME.exe"
- 4.6.2. Please follow the red blank.

