

LPC-P121S-1X

12.1" P-cap Panel PC with Celeron® N3160, IP65 / 66 Bezel-Free and Wide Range Power Input



Features

- ▶ Celeron® N3160 Quad Core 1.6 GHz
- ▶ IP65 / 66 Front Panel
- ▶ Bezel-Free Design
- ▶ 12.1" P-cap Flat Bezel
- ▶ Fanless Design
- ▶ 3-Pin Power Input Terminal Block
- ▶ DC 9~36V Wide Range Power Input
- ▶ 1024*768 Resolution
- ▶ 350 nits LED Backlight
- ▶ Optional 1000 nits LED Backlight
- ▶ Optional to Resistive Touch

System

Processor	Intel Celeron® N3160 SoC CPU
System Memory	DDR3L SO-DIMM, up to 8 GB
External I/O Port	4 x USB 3.0 2 x GbE LAN (RTL8111G) 1 x Display Port 1 x HDMI 3 x RS-232 1 x RS-232/422/485 (COM1) 1 x Audio
Storage	1 x Power press button 1 x 3-Pin Power Input 2 x SATA3 (6.0Gb/s) 1 x mSATA (full size mini-PCle)
Operating System	Win 7 Pro/ WES7 Win 8 / Win 10
Expansion	2 x MiniPCle Slot

LCD

Display Type	12.1" TFT LCD
Max. Resolution	1024*768
Max. Color	16.7M
Luminance	350 nits
View Angle	80/80/80/80
Backlight Lifetime	30,000 hours

Power Requirement

Power Input	3-Pin Power Input Terminal Block DC 9~36V Wide Range Power Input
-------------	---

Touch Screen

Type	12.1" P-cap USB
------	-----------------


Environment

Operating Temp	-20~60 °C , IEC-60068-2-1/2/14
Storage Temp	-30~70 °C
Humidity	10~90% @40 °C, non-condensing
EMC	FCC / CE Class A Certification CE Class B Compliant
Vibration	1.5 Grms @10~500Hz, IEC-60068-2-64

Mechanical

Construction	Aluminum Front Bezel and Metal Case
IP Rating	Front Panel IP65 / IP66 Compliant
Mounting	VESA / Panel Mount
Dimension	TBC

Dimension & I/O Connector

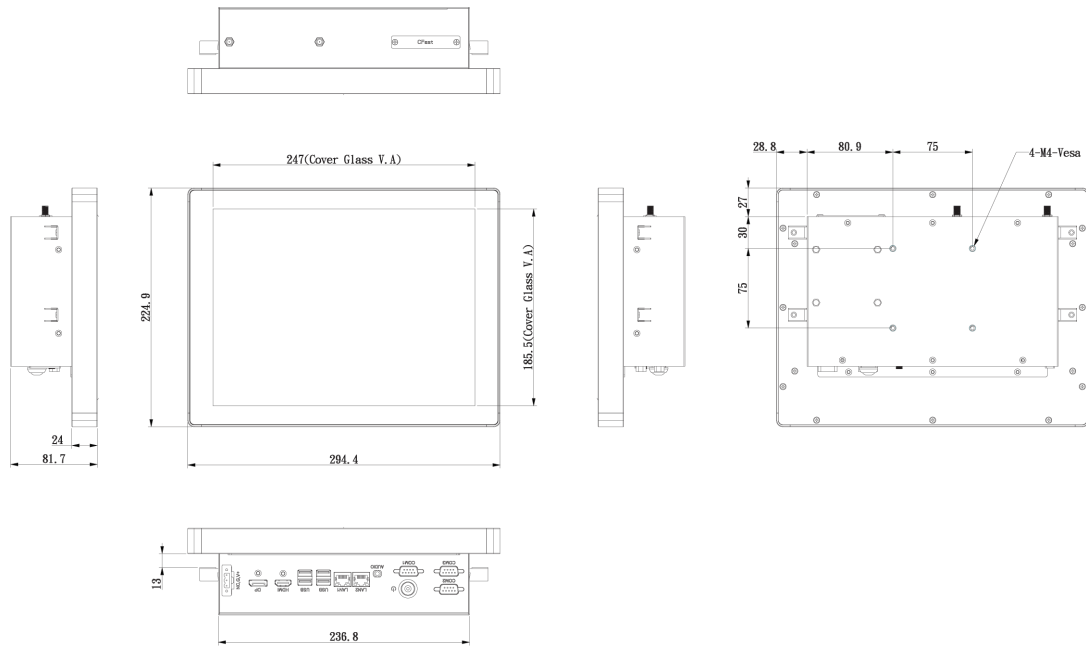

Ordering Information

LPC-P121S-15	12.1" P-cap Panel PC with i3-6100U, 1024 x 768 Resolution, 350 nits, DC9~36V Power Input, including a 3-Pin Power Adapter (12V/7.5A)
LPC-P121S-16	12.1 P-cap Panel PC with i5-6300U, 1024 x 768 Resolution, 350 nits, DC9~36V Power Input, including a 3-Pin Power Adapter (12V/7.5A)
LPC-P121S-17	12.1" P-cap Panel PC with i7-6600U, 1024 x 768 Resolution, 350 nits, DC9~36V Power Input, including a 3-Pin Power Adapter (12V/7.5A)
LPC-P121S-18	12.1" P-cap Panel PC with i5-7300U, 1024 x 768 Resolution, 350 nits, DC9~36V Power Input, including a 3-Pin Power Adapter (12V/7.5A)
WFK-024	WiFi kits w/ cable & Antenna (2.4GHz, 802.11 b/g/n, 1T1R)
WFK-524	WiFi kits w/ cable & Antenna (2.4 & 5GHz, 802.11 a/b/g/n/ac + BT, 2T2R)
04-US-26-00002	120 W / 24V power adapter with 3 pin terminal block (For High Brightness Model)

Ordering Code

LPC-P121S-1X Series -H / -OB / -G / -AG / -AR / -B / -V

H = High Brightness 1000 nits LED backlight

OB = Optical Bonding

G = Glass without touch

AG = Anti-Glare

AR = Anti-Reflection

V = Vandal Proof Glass (By Project)