

TOF-084S

8.4" touch open frame with VGA/DVI, panel mounting kits, 3-pin terminal block DC 12V adapter



Features

- ▶ VGA / DVI Port
- ▶ Panel Mounting Kits
- ▶ Optional DC 9~36V Power Input
- ▶ Optional 1000 nits High Brightness
- ▶ Optional Optical Bonding Service



Specification

LCD		Power Requirement	
Max. Resolution	800 x 600	Power Input	DC 12V adapter with 3-Pin Terminal Block Optional DC 9~36V Wide Range Power
Contrast Ratio	700 : 1	Mounting	Panel Mount VESA Mount 75x75
Max. Color	16.2 M	Operating Temp	0~50 °C
Luminance (cd/m2)	450 nits		
View Angle	135 / 160		
Touch Screen	USB Resistive		


Ordering Information

TOF-084S	8.4" touch open frame with VGA/DVI, panel mounting kits, 3-pin terminal block DC 12V adapter
TOF-084SH	8.4" touch open frame with 1000 nits brightness, VGA/DVI, panel mounting kits, 3-pin terminal block DC 12V adapter
TOF-084SB	8.4" touch open frame with VGA/DVI, panel mounting kits, DC 9~36V wide range power input
TOF-084SOCA (By Project)	8.4" touch open frame with optical bonding, VGA/DVI, panel mounting kits, 3-pin terminal block DC 12V adapter

* All specifications are subject to change without prior notice.



Dimension

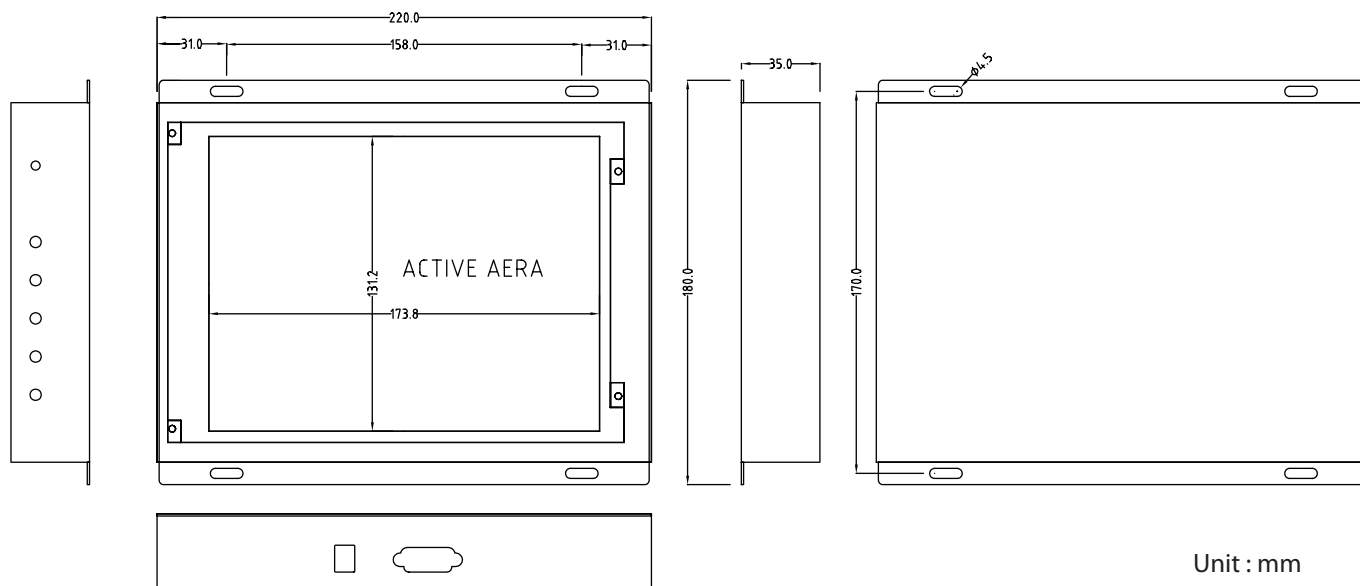

Unit : mm